




alurays —
LIGHTING
TECHNOLOGY






LED PROFILE/ *LED PROFILES:*

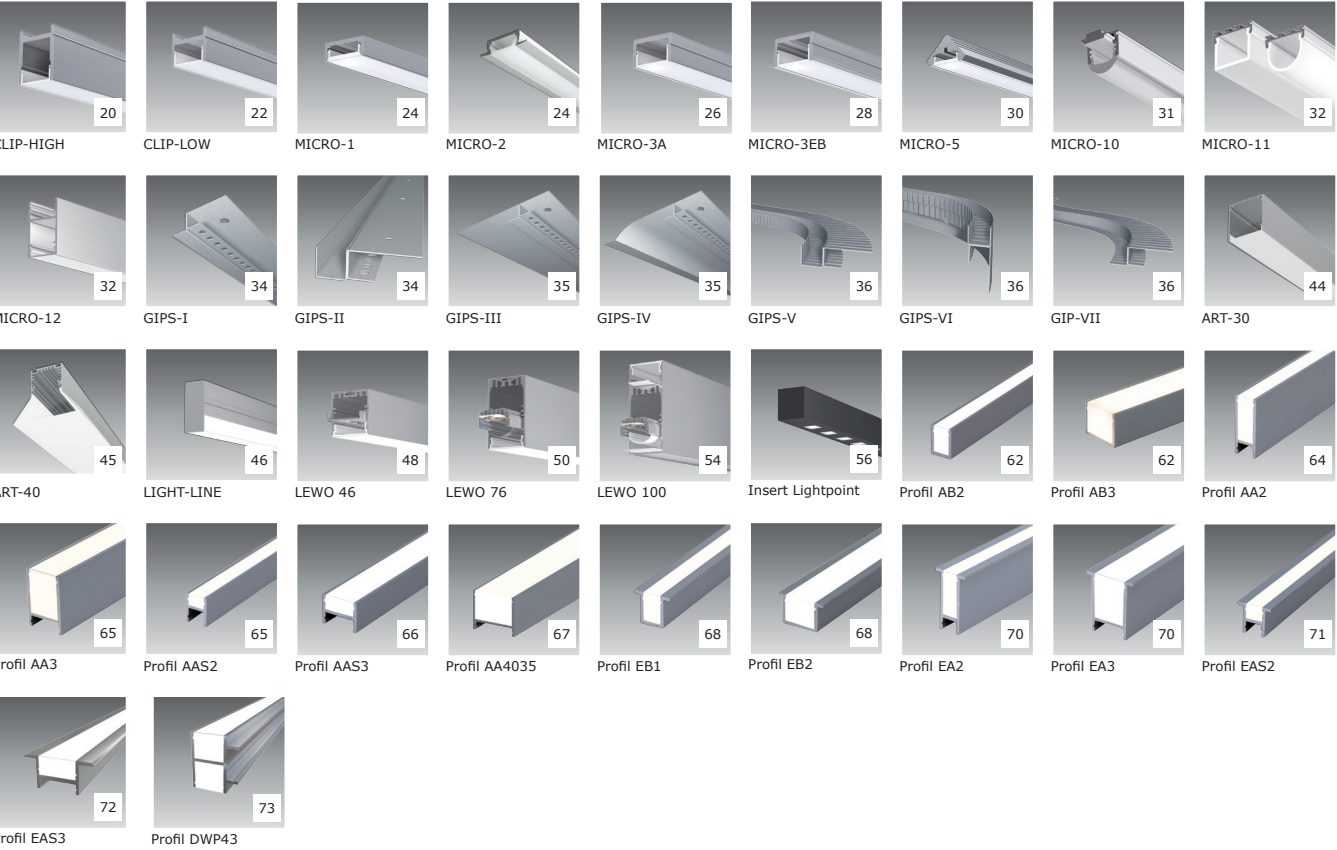


LED EINBAULEUCHTEN/ *LED RECESSED FIXTURES:*




LED STRIPES/ *LED STRIPES:*

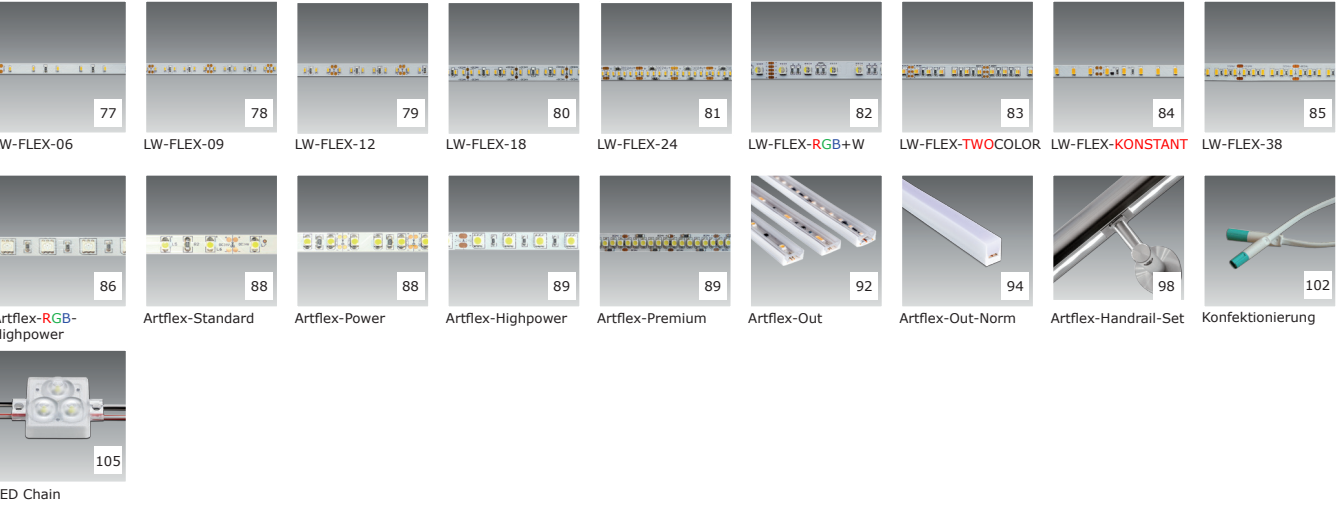

LED ANBAU- UND PENDELLEUCHTEN/ *LED CEILING- & PENDANT FIXTURES:*

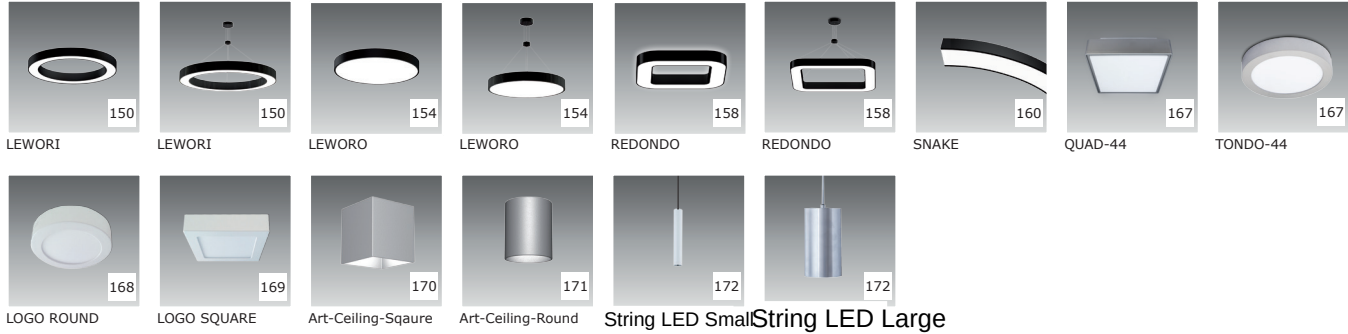

LED PANELE & LICHTDECKEN/ *LED PANELS & CEILING LIGHTS:*

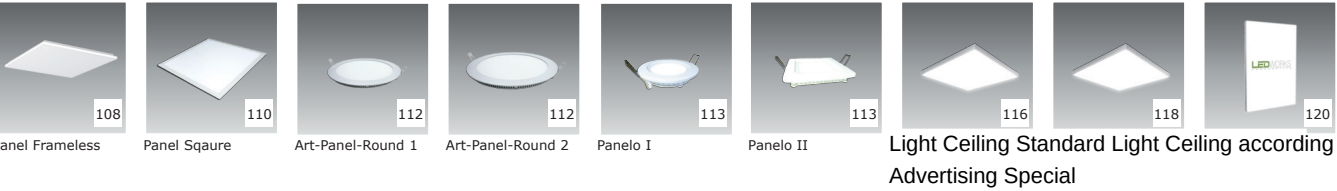

LED STEHLEUCHTE/ *LED FLOOR FIXTURES:*



LED STRAHLER/ *LED SPOTLIGHT:*





LED AUSSENBELEUCHTUNG/ *LED OUTDOOR FIXTURES:*




LED BODENEINBAUSTRALER/ *LED RECESSED GROUND FIXTURES:*



LED ZUBEHÖR/ *LED ACCESSORIES:*





LED ZUBEHÖR/ *LED ACCESSORIES:*

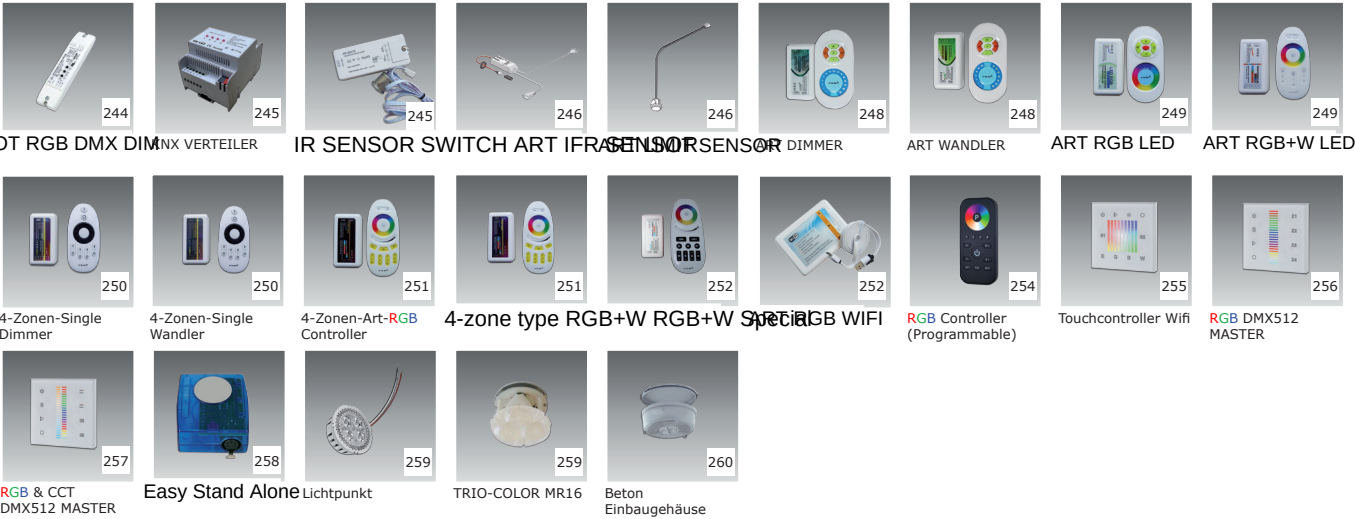






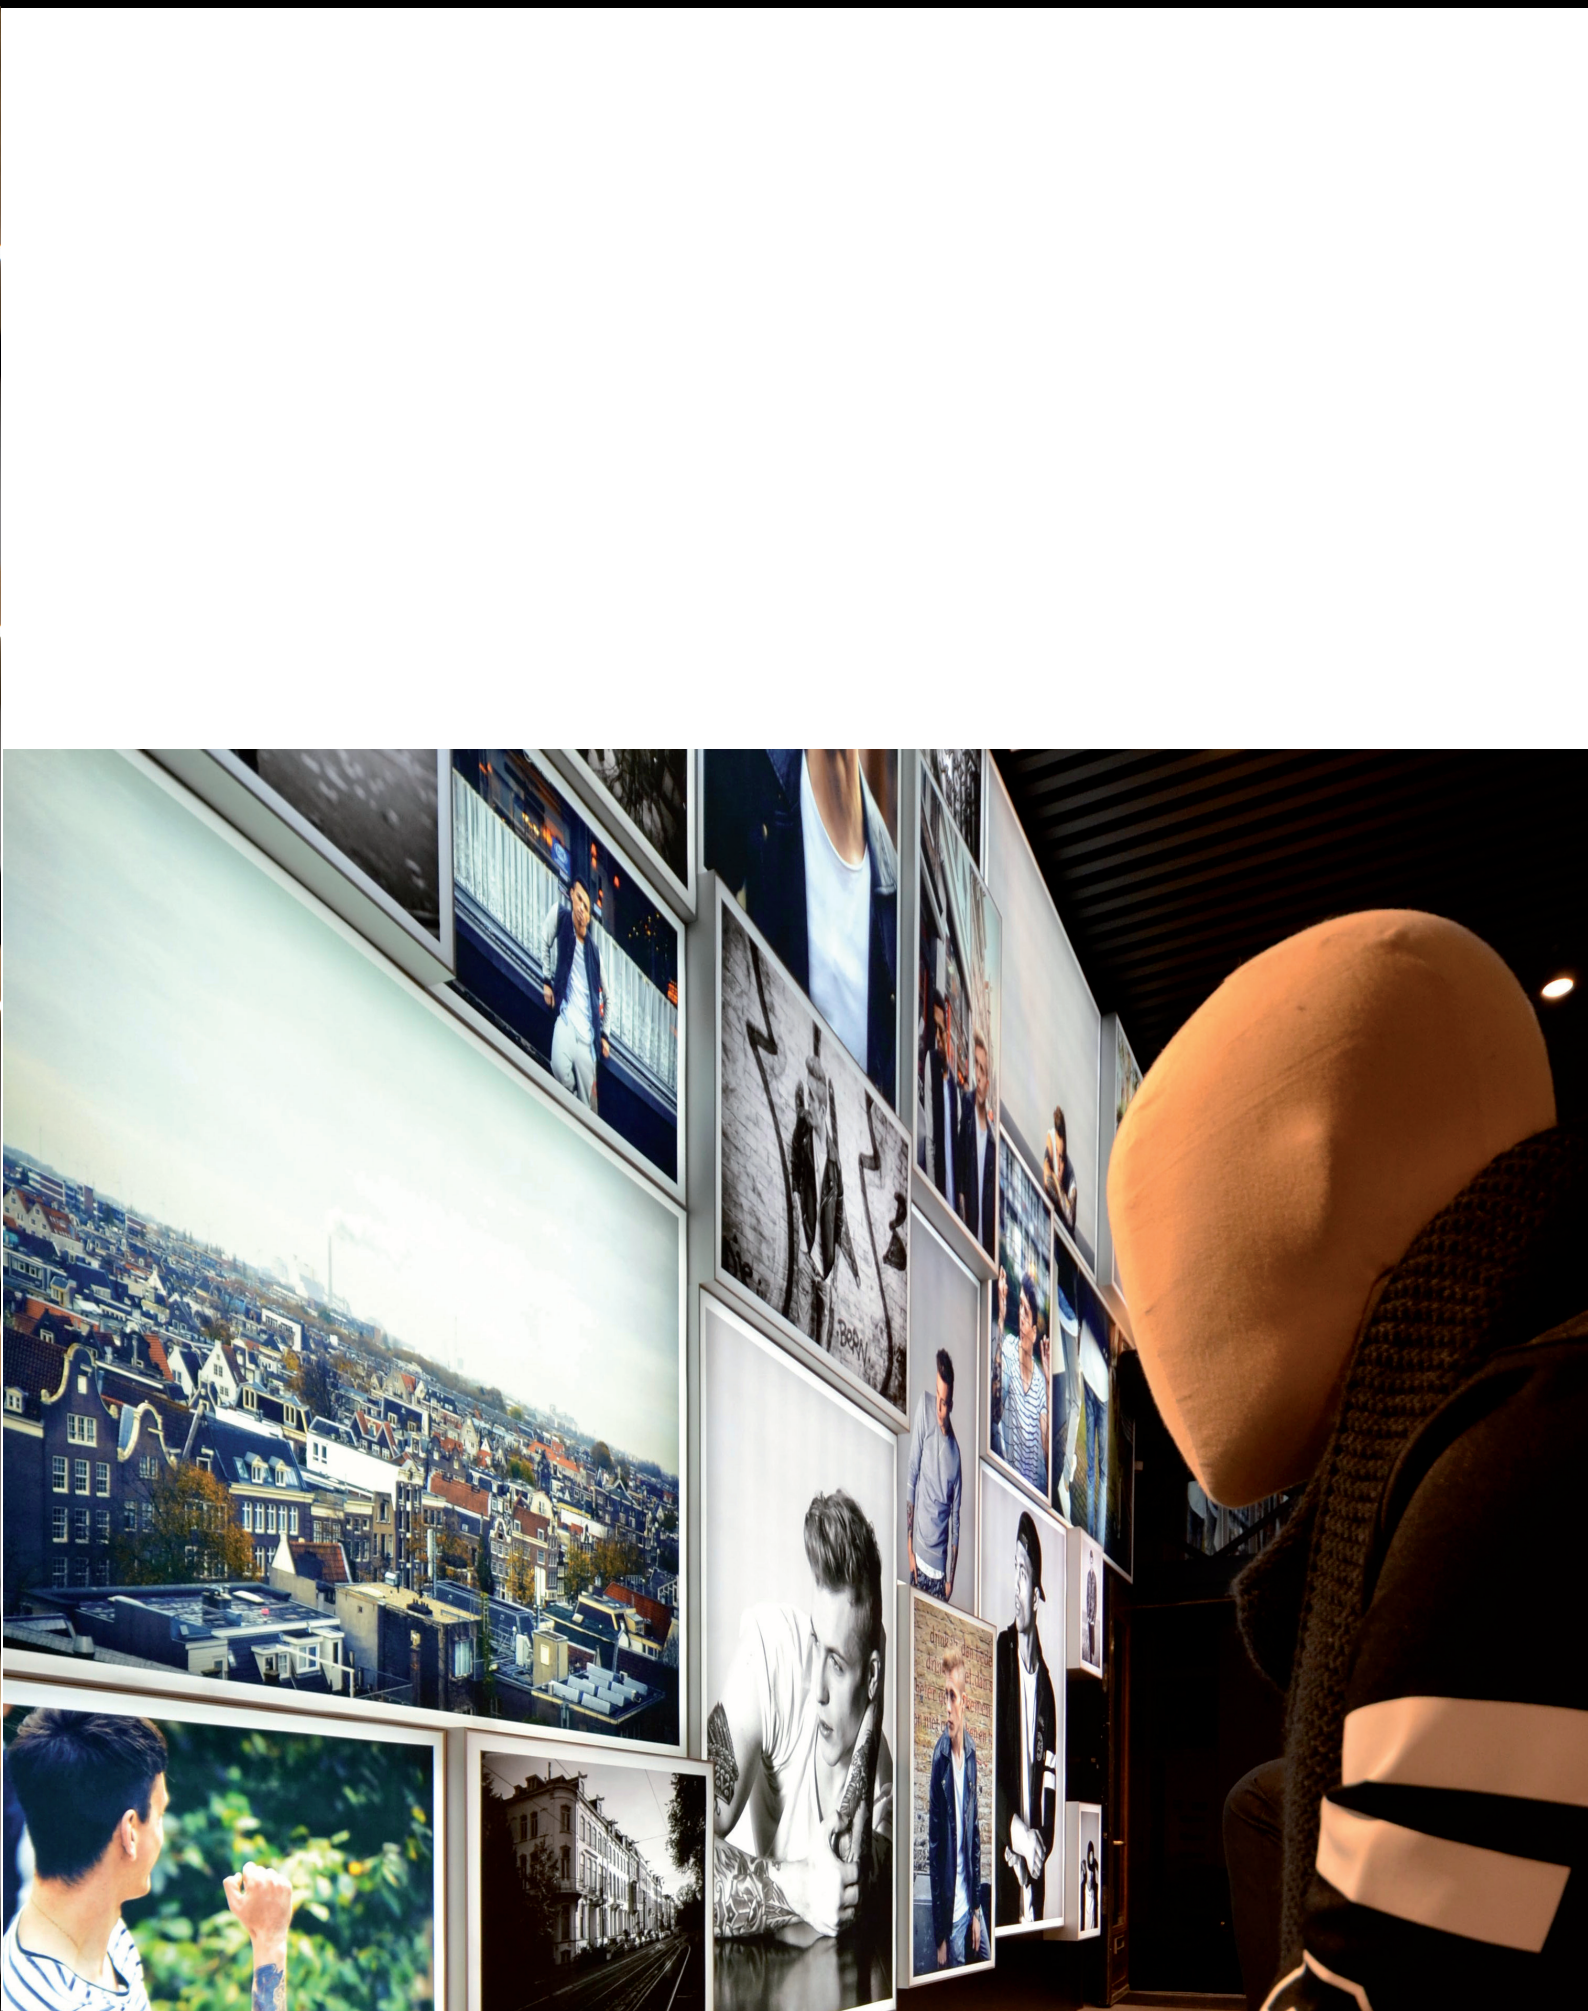


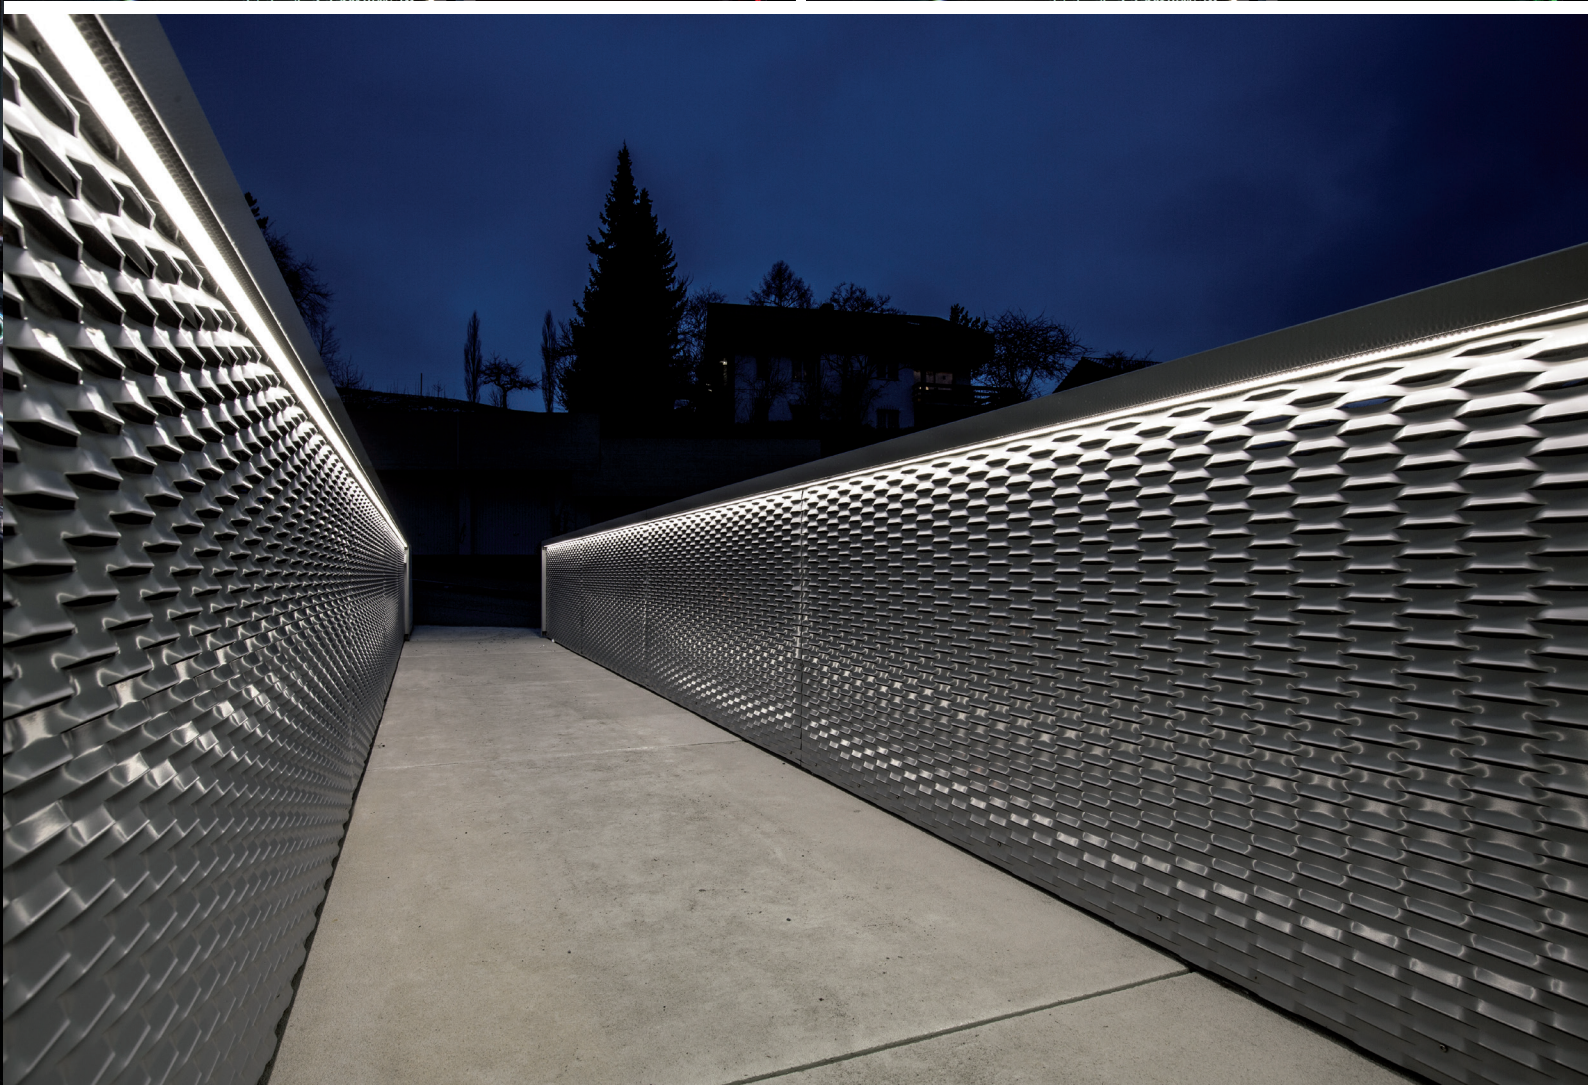




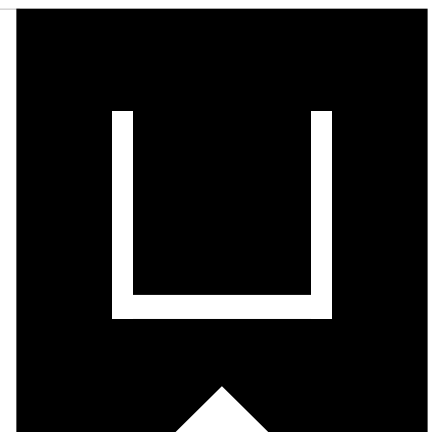


LED PROFILE
LED PROFILES



CLIP-HIGH




CLIP-LOW




MICRO-1




MICRO-2




MICRO-3A




MICRO-3EB




MICRO-5




MICRO-10




MICRO-11




MICRO-12



GIPS-I




GIPS-II




GIPS-III




GIPS-IV




GIPS-V




GIPS-VI




GIP-VII




ART-30



ART-40




LIGHT-LINE




LEWO 46




LEWO 76




LEWO 100




Insert Lightpoint




Profil AB2




Profil AB3




Profil AA2




Profil AA3




Profil AAS2




Profil AAS3




Profil AA4035




Profil EB2




Profil EB3




Profil EA2




Profil EA3



Profil EAS2




Profil EAS3




Profil DWP43





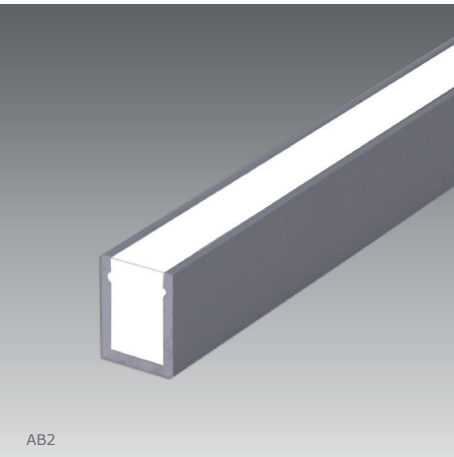

AB2



AB2-OP

PROFIL AB2

?Construction profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 10W/m, 400lm/m, 24V DC, warm white 3000K, CRI>80Ra
?Assembly note: is supplied with PU construction glue order silicone in
Wall or ceiling openings glued in, bandaged, plastered or plastered
construction side

·Endstucke on request

- Standard-Länge: 2000mm

? surface mounted profiles (anodised aluminium) with opal semi
translucent sealed encapsulation IP67
·standard:10W/m, 400lm/m,24V DC, warm white 3000K, CRI>80Ra
?mounting instruction: willbe glued, grounted, presented or wall mounted
with PU-glue or silicone in on-site wall/ceiling openings
·end caps on request
• *excl. converter*
• *standard length: 2000mm*




240 LED's/meters


?Profile + cover opal white (without LED)
profile + cover opal white (without LED)
· Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

AB2-OP

AB2

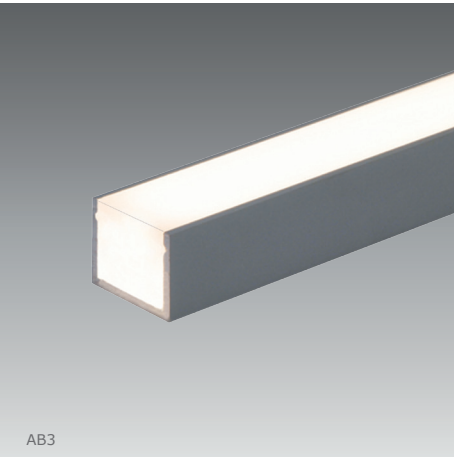

AB3



AB3-OP

PROFIL AB3

?Construction profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 20W/m, 800lm/m, 24V DC, warm white 3000K, CRI>80Ra
·Assembly note: is supplied with PU construction glue order silicone in
Wall or ceiling openings glued in, bandaged, plastered or plastered
construction side

·Endstucke on request

- Standard-Länge: 2000mm

?surface mounted profiles (anodised aluminium) with opal semi
translucent sealed encapsulation IP67
?Standard: 20W/m, 800lm/m, 24V DC, warm white 3000K, CRI>80Ra
?mounting instruction: will be glued, grounted, paved or wall mounted
with PU-glue or silicone in on-site wall/ceiling openings
? end caps on request

·standard length: 2000mm




700 LED's/meters

· Profile + cover opal white (without LED)
profile + cover opal white (without LED)
?Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

AB3-OP

AB3





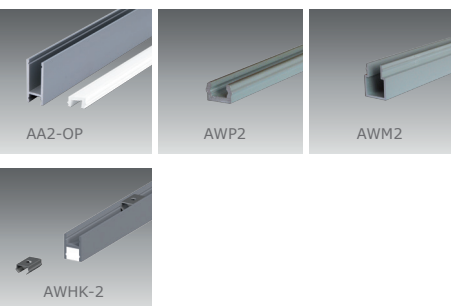


- *standard length: 2000mm*




AWM2







! Other confirmations on request!
Other assembly on request!

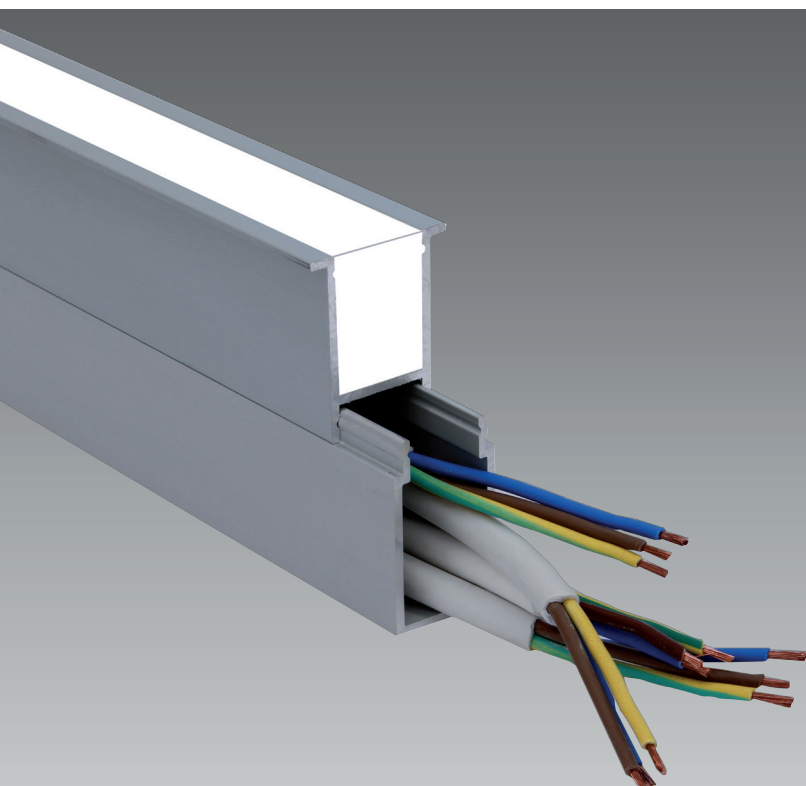

Example for EA-3 with cable channel AKF-3
example for EA-3 with cable conduit AKF-3

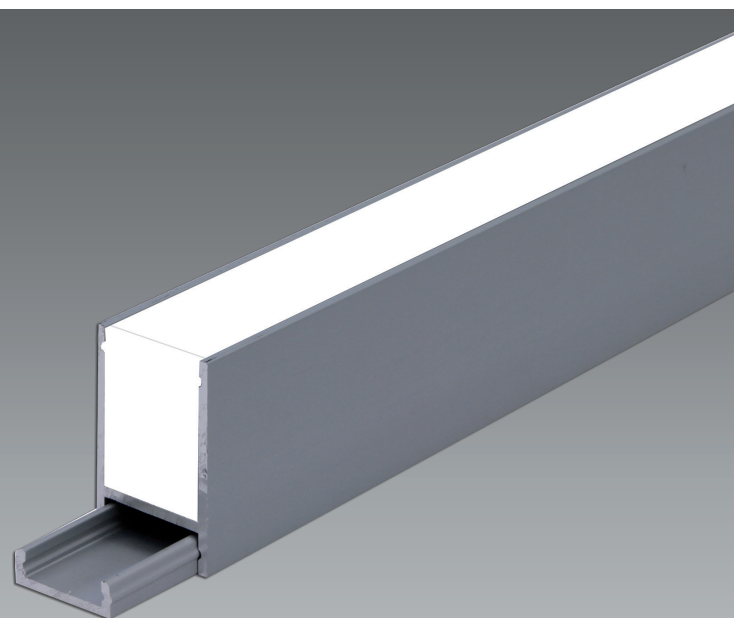

Example for AA3 with subpart AWF-3
example for AA3 with aluminium frame AWF-3










? end caps on request; excl. converter





AWHK-3

240 LED's/meters

- recessed ceiling springs (1x)

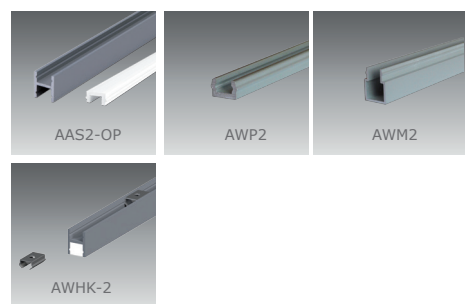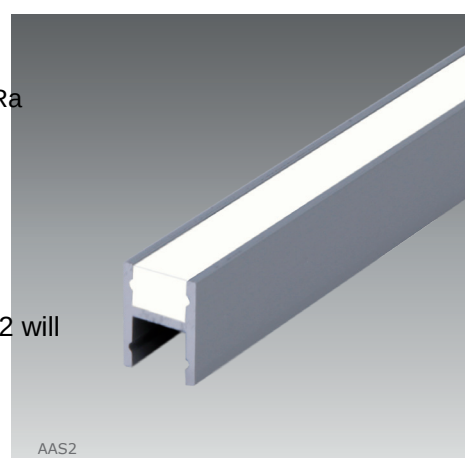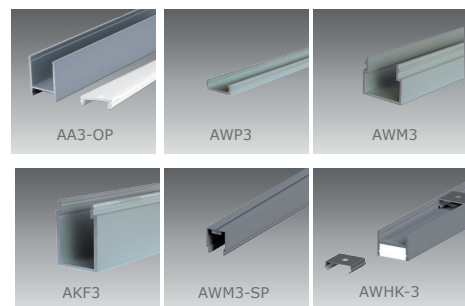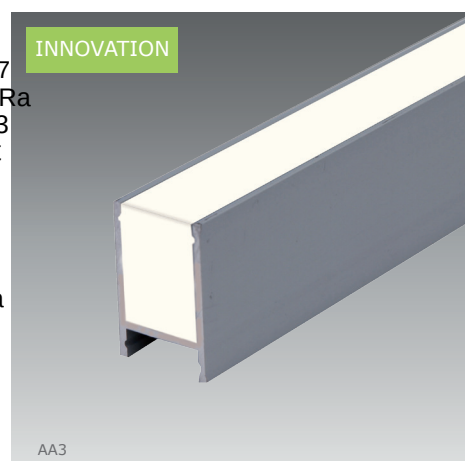

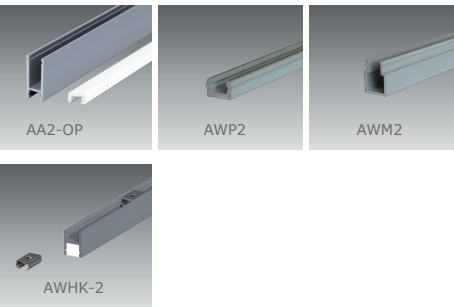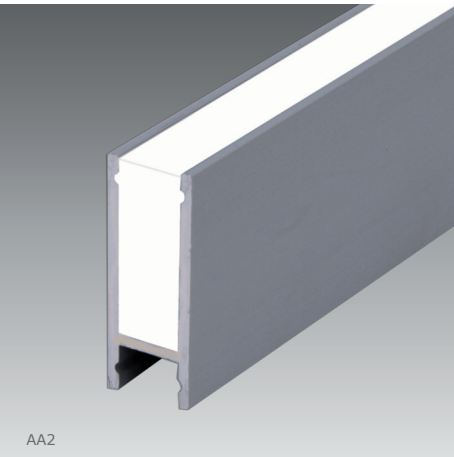

PROFIL AA2

?Construction profile (aluminium anodized) with VerguB opal matt IP67
?Standard: 10w/m, 350lm/m, 24V DC, warm white 3000K, CRI>80Ra
· Assembly with counter-profiles (AWP2 for inserting or AWM2 with Space for cable handling (e.g. Endstücke on request, empty space for cable handling)

- Standard-Länge: 2000mm

?surface mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
· standard:10W/m,350lm/m, 24V DC,warm white 3000K, CRI>80Ra
· mounting with an anodised extruded aluminium frame (AWP2 will only slide into or AWM2 with space for cabeling)
· end caps on request

- excl. converter

?Standard length: 2000mm



240 LED's/meters

?Profile + cover opal white (without LED)
profile + cover opal white (without LED)

AA2-OP

· Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

AA2

·Subpart with slide-in function
aluminium frame with slide-in function







AWP2

? Cable channel with slide-in function
cable conduit with slide-in-function


AWM2

- Deckeneinbaufedern (1x)
recessed ceiling springs (1x)

AWHK-2



AWM3-SP



PROFIL AA3

?Construction profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 20W/m, 1000lm/m, 24V DC, warm white 3000K, CRI>80Ra
· Assembly with counterprofiles (AWP3 for insertion or AWM3/ AKF3 with empty space for cable feeding); end sockets on request

- Standard-Länge: 2000mm

· surface mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
· standard:20W/m,1000lm/m, 24V DC,warm white 3000K, CRI>80Ra
· mounting with an anodised extruded aluminium frame (AWP3 will only slide into or AWM3/ AKF3 with space for cabeling)
? end caps on request; excl. converter



240 LED's/meters

? Profile + cover opal white (without LED)
profile + cover opal white (without LED)

AA3-OP

? Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

AA3

? Subpart with slide-in function
aluminium frame with slide-in function

AWP3

·Cable channel NETHER with slide-in function
cable conduit LOW with slide-in-function

AWM3

?Cable channel HIGH with slide-in function
cable conduit HIGH with slide-in-function




AKF3

· Cable channel for hanging (NEW)
cable conduit to hang (NEW)


AWM3-SP

- Deckeneinbaufedern (1x)
recessed ceiling springs (1x)




AWHK-3

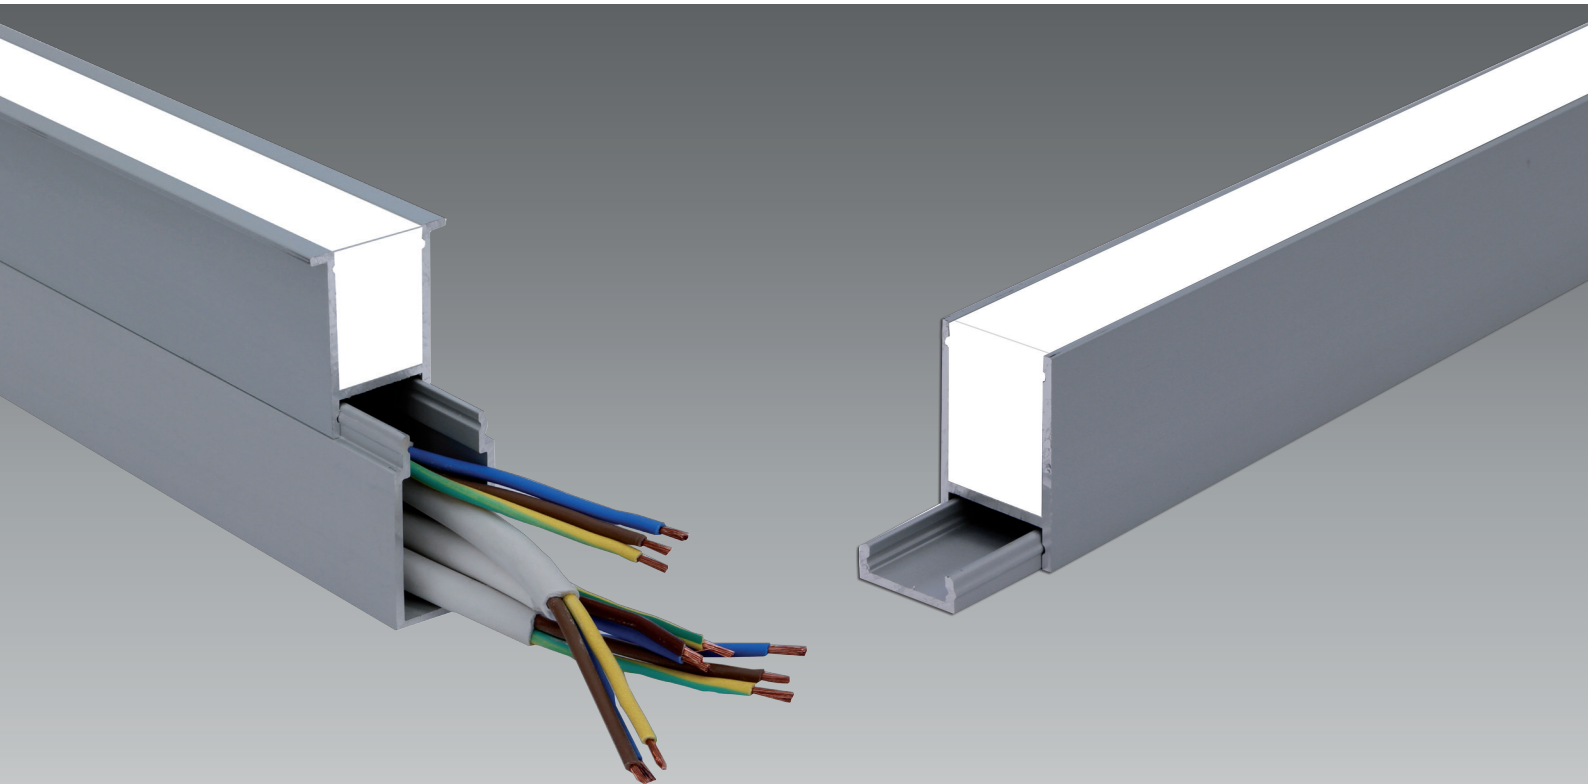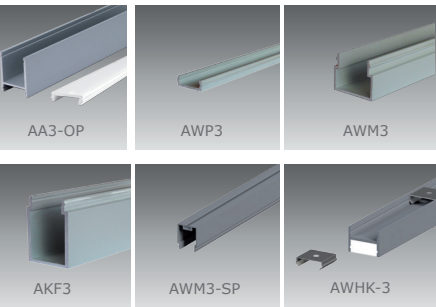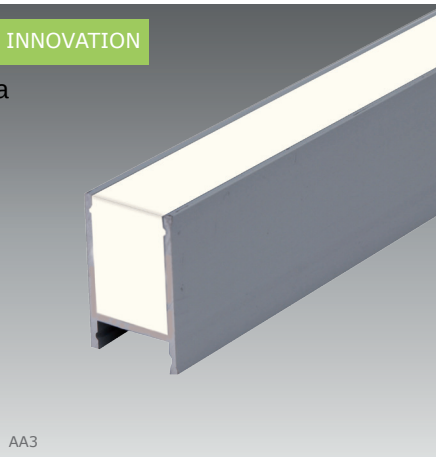

Example for EA-3 with cable channel AKF-3
example for EA-3 with cable conduit AKF-3

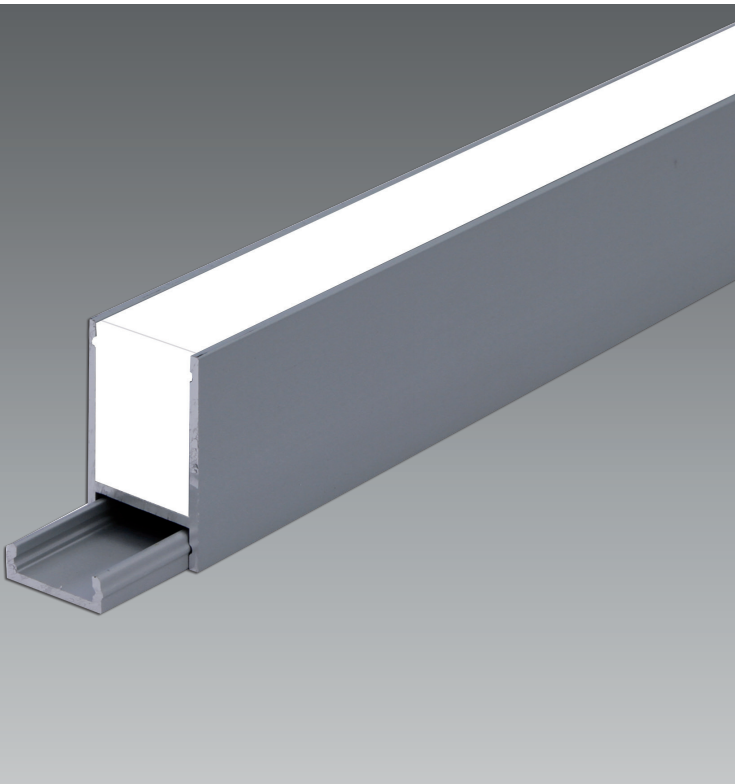

Example for AA3 with subpart AWF-3
example for AA3 with aluminium frame AWF-3



PROFIL AAS2

?Construction profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 10W/m, 600lm/m, 24V DC, warm white 3000K, CRI>80Ra
· Assembly with counter-profiles (AWP2 for inserting or AWM2 with empty space for cable feeding); end-sticks on request;

- Standard length: 2000mm

· surface mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67

?standard:10W/m, 600lm/m, 24V DC, warmwhite 3000K, CRI>80Ra

· mounting with an anodised extruded aluminium frame (AwP2 will only slide into or AWM2 with space for cabeling)

? end caps on request; excl. converter;



240 LED's/meters

? Profile + cover opal white (without LED)
profile + cover opal white (without LED)

AAS2-OP

?Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

AAS2

·Subpart with slide-in function
aluminium frame with slide-in function


AWP2



?Cable channel with slide-in function
cable conduit with slide-in-function

AWM2

- recessed ceiling springs (1x)

AWHK-2

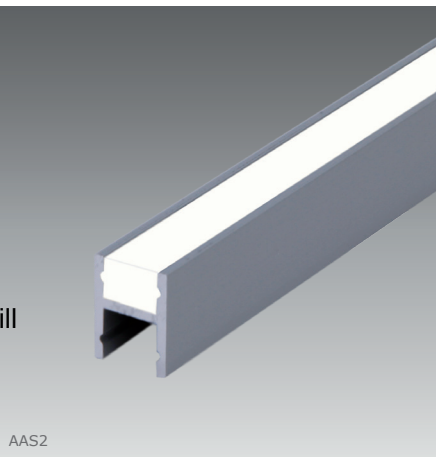

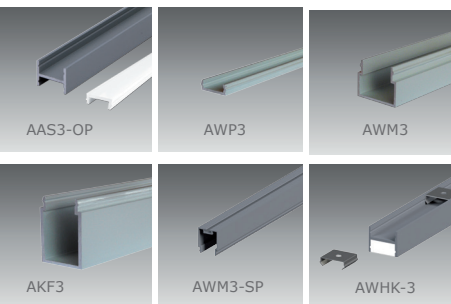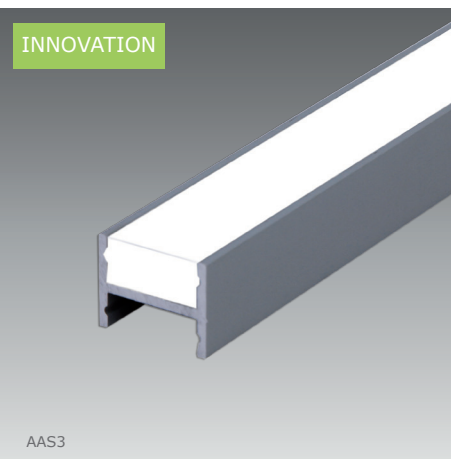

PROFIL AAS3

?Construction profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 20W/m, 1000lm/m, 24V DC, warm white 3000K, CRI>80Ra
·Assembly with counterprofiles (AWP3 for insertion or AWM3/ AKF3 with empty space for cable operation)
·Endstucke on request

- Standard-Länge: 2000mm

?surface mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard:20W/m,1000lm/m,24V DC, warm white 3000K, CRI>80Ra
·mounting with an anodised extruded aluminium frame (AwP3 will only slide into or AWM3/ AKF3 with space for cabeling)
?end caps on request

- excl. converter
- standard length: 2000mm



700 LED's/meters

?Profile + cover opal white (without LED)
profile + cover opal white (without LED)

AAS3-OP

· Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

AAS3

·Subpart with slide-in function
aluminium frame with slide-in function

AWP3

?Cable channel NETHER with slide-in function
cable conduit LOW with slide-in-function

AWM3

?Cable channel HIGH with slide-in function
cable conduit HIGH with slide-in-function



AKF3

?Cable channel for hanging (NEW)
cable conduit to hang (NEW)

AWM3-SP

- Deckeneinbaufedern (1x)
recessed ceiling springs (1x)

AWHK-3

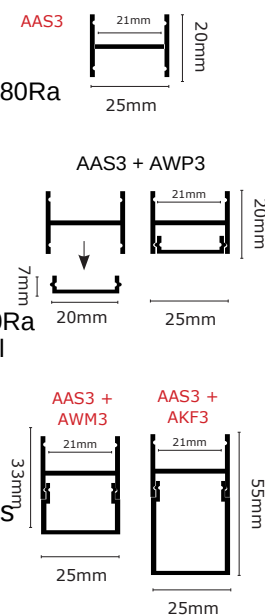

on request!
Other assembly
on

PROFIL AA4035

?Construction profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 20W/m, 1000lm/m, 24V DC, warm white 3000K, CRI>80Ra
?Assembly with counter-profile (AKF4025 with empty space for cable feed)
·Endstucke on request, excluding converters

?surface mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard:20W/m,1000lm/m, 24V DC,warm white 3000K, CRI>80Ra
·mounting with an anodised extruded aluminium frame (AKF4025 with space for cabeling)
? end caps on request, excl. converter



480 LED's/meters

?Profile + cover opal white (without LED)
profile + cover opal white (without LED)

AA4035-OP




?Profile + IP68 VerguB + LED (without converter)
profile + IP68 encapsulation + LED (without converter)


AA4035

? Cable channel with slide-in function (high 25mm)
cable conduit with slide-in-function (height 25mm)


AKF4025

! This profile is also available with other cable channels (high 25mm, 15mm or 10mm).
In addition, th/s profile is also available with other cable consult (height 25mm, 15mm or 10mm).

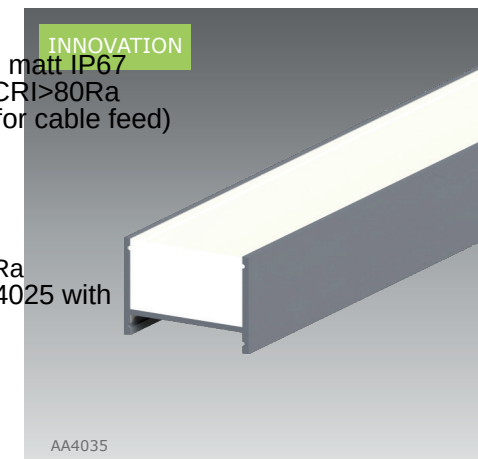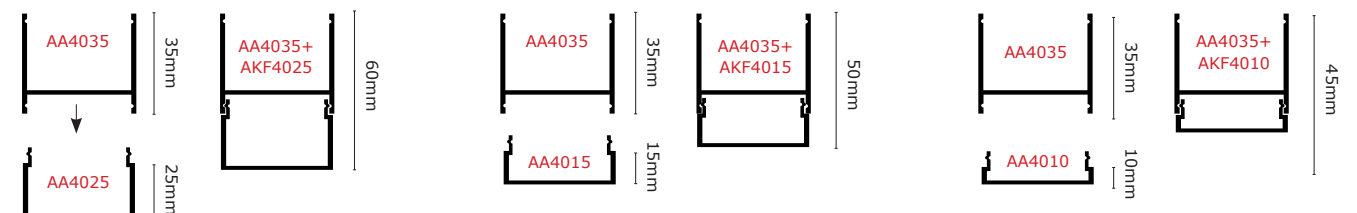

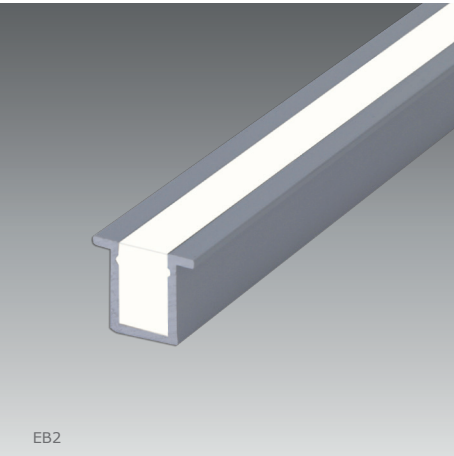

EB2



EB2-OP

PROFIL EB2

?Installation profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 10W/m, 400lm/m, 24V DC, warm white 3000K, CRI>80Ra
·Assembly: is used with PU construction glue or silicone in construction side
Wall or ceiling openings glued or plastered

- exkl. Konverter
- Standard length: 2000mm

recessed mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard:10W/m, 400lm/m,24V DC, warm white 3000K, CRI>80Ra
?mounting instruction: will be glued or postered with PU-glue or silicone in on-site wall or ceiling openings
?ceiling cutout width 16mm

?Standard length: 2000mm




240 LED's/meters

? Profile + cover opal white (without LED)
profile + cover opal white (without LED)


EB2-OP

?Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)


EB3



on request!
Other assembly on

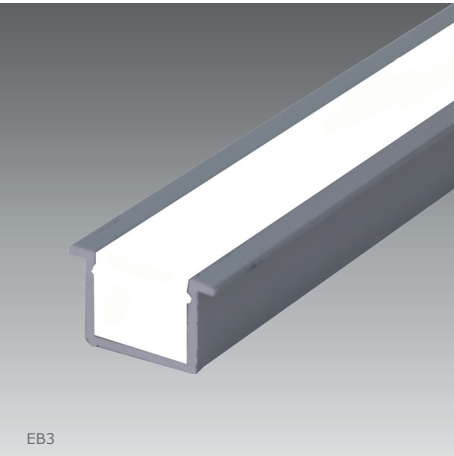

EB3



EB3-OP

EB3-FK

PROFIL EB3

?Installation profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 20w/m,800lm/m, 24V DC, warm white 3000K, CRI>80Ra
? Assembly: is used with PU construction glue or silicone in construction side
Wall or ceiling openings glued or plastered

- exkl. Konverter
- Standard-Länge: 2000mm

recessed mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard: 20W/m,800lm/m, 24V DC,warm white 3000K, CRI>80Ra
?mounting instruction: will be glued or postered with PU-glue or silicone in on-site wall or ceiling openings
·ceiling cutout width 26mm

- standard length: 2000mm



700 LED's/meters

?Profile + cover opal white (without LED)
profile + cover opal white (without LED)


EB3-OP

· Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

EB3


- Federhalterung (1x)
spring reservoir (1x)

EB3-FK




on request!
Other assembly on



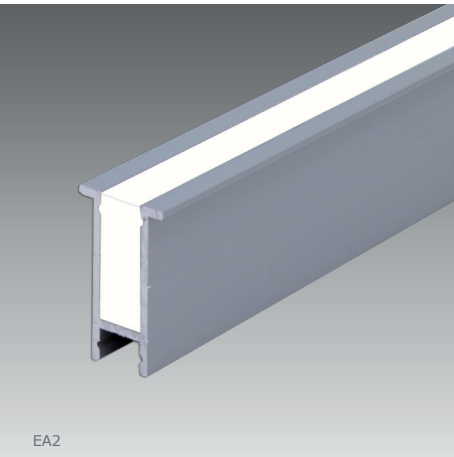

EA2

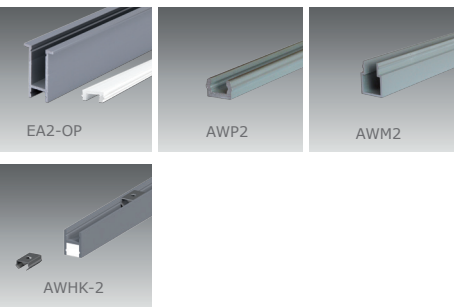

PROFIL EA2

- ?Installation profile (aluminium anodized) with VerguB opal matt IP67
?Standard: 10w/m, 350lm/m, 24V DC, warm white 3000K, CRI>80Ra
· Assembly with counter-profiles (AWP2 for inserting or AWM2 with Space for cable handling (e.g.
· empty space for cable handling)
· exkl. Konverter
• Standard-Länge: 2000mm

- recessed mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard:10W/m, 350lm/m, 24V DC, warm white 3000K, CRI>80Ra
·mounting with an anodised extruded aluminium frame (AWP2 will only slide into or AWM2 with space for cabeling)
?ceiling cutout width 16mm

- standard length: 2000mm



240 LED's/meters

? Profile + cover opal white (without LED)
profile + cover opal white (without LED)

EA2-OP

? Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

EA2

?Subpart with slide-in function
aluminium frame with slide-in function




AWP2

?Cable channel with slide-in function
cable conduit with slide-in-function


AWM2

- recessed ceiling springs (1x)

AWHK-2

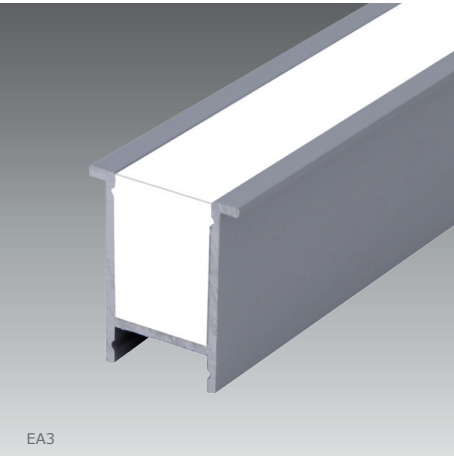

EA3

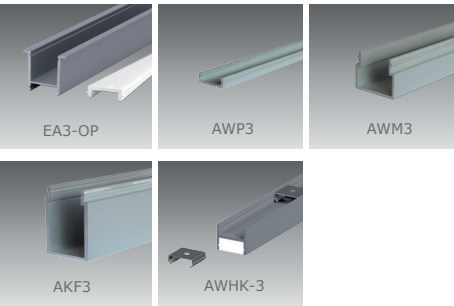

PROFIL EA3

- Installation profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 20W/m, 1000lm/m, 24V DC, warm white 3000K, CRI>80Ra
· Mounting with counter-profiles (AWP3 for inserting or AWM3/ AKF3 with Space for cable handling (e.g.
· empty space for cable handling)
· exkl. Konverter
• Standard-Länge: 2000mm

- recessed mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard:20W/m, 1000lm/m, 24V DC, warm white 3000K, CRI>80Ra
·mounting with an anodised extruded aluminium frame (AWP3 will only slide into or AWM3/ AKF3 with space for cabeling)
?ceiling cutout width 26mm

?Standard length: 2000mm



240 LED's/meters

?Profile + cover opal white (without LED)
profile + cover opal white (without LED)

EA3-OP

· Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

EA3

?Subpart with slide-in function
aluminium frame with slide-in function

AWP3

? Cable channel NETHER with slide-in function
cable conduit LOW with slide-in-function




AWM3

?Cable channel HIGH with slide-in function
cable conduit HIGH with slide-in-function


AKF3

- recessed ceiling springs (1x)

AWHK-3



EAS2

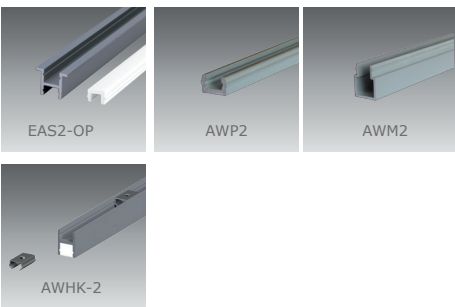

PROFIL EAS2

- ?Installation profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 10W/m, 600lm/m, 24V DC, warm white 3000K, CRI>80Ra
· Assembly with counter-profiles (AWP2 for inserting or AWM2 with Space for cable handling (e.g.
· empty space for cable handling)
· end sticks on request

- Standard-Länge: 2000mm

- ?recessed mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard:10W/m, 600lm/m,24V DC, warm white 3000K, CRI>80Ra
·mounting with an anodised extruded aluminium frame (AWP2 will only slide into or AWM2 with space for cabeling)
? ceiling cutout width 16mm
? end caps on request

?Standard length: 2000mm



240 LED's/meters

·Profile + cover opal white (without LED)
profile + cover opal white (without LED)

EAS2-OP

?Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

EAS2

? Subpart with slide-in function
aluminium frame with slide-in function




AWP2


·Cable channel with slide-in function
cable conduit with slide-in-function

AWM2

- Deckeneinbaufedern (1x)
recessed ceiling springs (1x)

AWHK-2



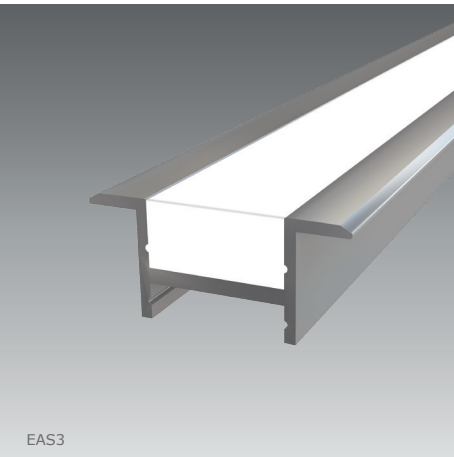

PROFIL EAS3

?Installation profile (aluminium anodized) with VerguB opal matt IP67
?Standard: 20w/m, 1000lm/m, 24V DC, warm white 3000K, CRI>80Ra
·Assembly with counterprofiles (AWP3 for insertion or AWM3/ AKF3 with empty space for cable feeding)

·Endstucke on request


- Standard-Länge: 2000mm

?recessed mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard:20W/m,1000lm/m,24V DC, warm white 3000K, CRI>80Ra
·mounting with an anodised extruded aluminium frame (AWP3 will only slide into or AWM3/ AKF3 with space for cabeling)
?ceiling cutout width 26mm
·end caps on request


- standard length: 2000mm



700 LED's/meters

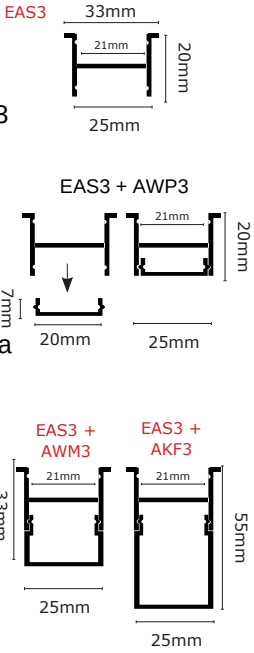

- | | |
|---|---------|
| ?Profile + cover opal white (without LED)
profile + cover opal white (without LED) | EAS3-OP |
| · Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter) | EAS3 |
| ·Subpart with slide-in function
aluminium frame with slide-in function | AWP3 |
| ? Cable channel NETHER with slide-in function
cable conduit LOW with slide-in-function | AWM3 |
| ? Cable channel HIGH with slide-in function
cable conduit HIGH with slide-in-function | AKF3 |
| • Deckeneinbaufedern (1x)
recessed ceiling springs (1x) | AWHK-3 |

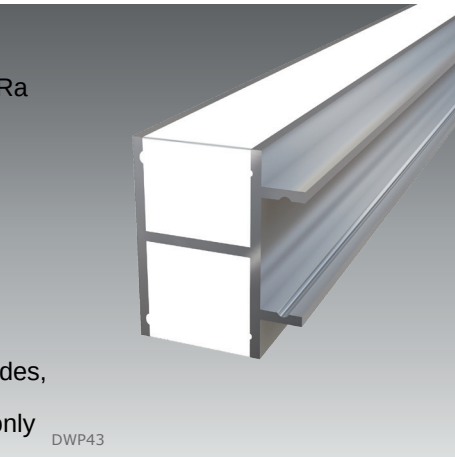

PROFIL DWP43

?Both side beaming profile with VerguB opal matt IP67
·Standard: 20W/m, 1000lm/m, 24V DC, warm white 3000K, CRI>80Ra
?Profile can be mounted either horizontally or vertically accompanying the wall become and shine either up/down or right/left
·Assembly with counterprofiles (AWP3 for insertion or AWM3/ AKF3 with empty space for cable feeding)


Excluding converters and end-stacks

- Standard-Länge: 2000mm


·both sides radiating surface mounted profile with opal semi translucent sealed encapsulation IP67
·standard:20W/m,1000lm/m,24V DC,warmwhite 3000K,CRI>80Ra
· can be mounted either parallel or vertical and emits light on both sides, either right/left or up/down
?mounting with an anodised extruded aluminium frame (AWP3 will only slide into or AWM3/ AKF3 with space for cabeling)
? excl. controller and end caps




480 LED's/meters




- | | |
|--|---------|
| ?Profile + cover opal white (without LED)
profile + cover opal white (without LED) | DWP3-OP |
| ?Profile + IP67 Verification + LED (without converter)
profile + IP67 encapsulation + LED (without converter) | DWP3 |
| ? Subpart with slide-in function
aluminium frame with slide-in function | AWP3 |
| ?Cable channel NETHER with slide-in function
cable conduit LOW with slide-in-function | AWM3 |
| ?Cable channel HIGH with slide-in function
cable conduit HIGH with slide-in-function | AKF3 |

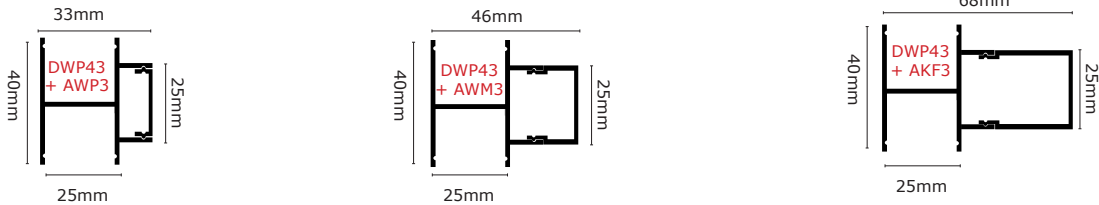


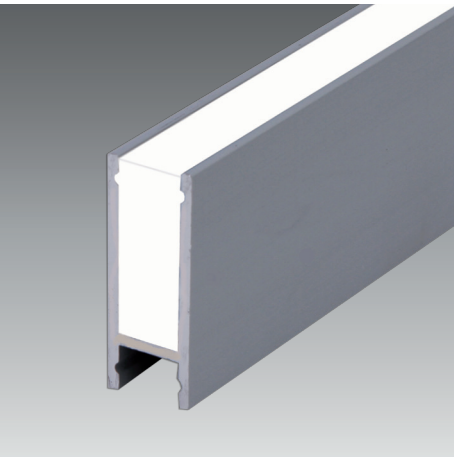


AA2



AA2-OP




AWP2



AWM2

AWHK-2

! Other confirmations on request!
Other assembly on request!

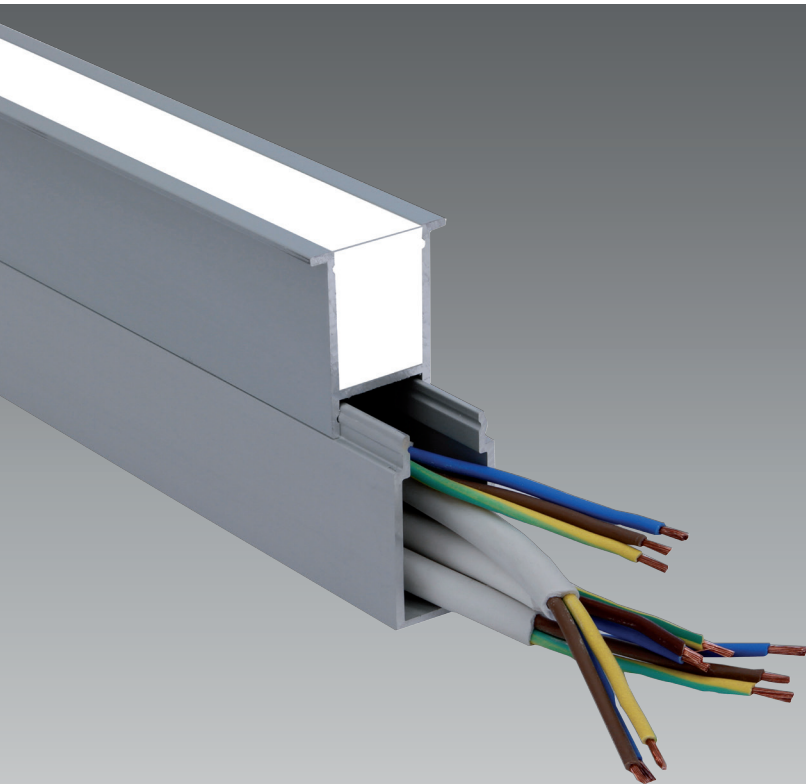

Example for EA-3 with cable channel AKF-3
example for EA-3 with cable conduit AKF-3

PROFIL AA2

?Construction profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 10w/m, 350lm/m, 24V DC, warm white 3000K, CRI>80Ra
·Assembly with counter-profiles (AWP2 for inserting or AWM2 with empty space for cable handling)
·Endstucke on request

- Standard-Länge: 2000mm

?surface mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard:10W/m, 350lm/m, 24V DC, warm white 3000K, CRI>80Ra
?mounting with an anodised extruded aluminium frame (AWP2 will only slide into or AWM2 with space for cabeling)
?end caps on request

- *excl. converter*

?Standard length: 2000mm



240 LED's/meters

?Profile + cover opal white (without LED)
profile + cover opal white (without LED)

AA2-OP

· Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

AA2

? Subpart with slide-in function
aluminium frame with slide-in function





AWP2

? Cable channel with slide-in function
cable conduit with slide-in-function

AWM2

- Deckeneinbaufedern (1x)
recessed ceiling springs (1x)

AWHK-2



PROFIL AA3

?Construction profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 20W/m, 1000lm/m, 24V DC, warm white 3000K, CRI>80Ra
·Assembly with counterprofiles (AWP3 for insertion or AWM3/ AKF3 with empty space for cable feeding); end sockets on request

- Standard-Länge: 2000mm

· surface mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard:20W/m,1000lm/m, 24V DC,warm white 3000K, CRI>80Ra
·mounting with an anodised extruded aluminium frame (AWP3 will only slide into or AWM3/ AKF3 with space for cabeling)

? end caps on request; excl. converter

?Standard length: 2000mm



240 LED's/meters

? Profile + cover opal white (without LED)
profile + cover opal white (without LED)

AA3-OP

?Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

AA3

? Subpart with slide-in function
aluminium frame with slide-in function

AWP3

·Cable channel NETHER with slide-in function
cable conduit LOW with slide-in-function

AWM3

?Cable channel HIGH with slide-in function
cable conduit HIGH with slide-in-function


AKF3

?Cable channel for hanging (NEW)
cable conduit to hang (NEW)

AWM3-SP

- Deckeneinbaufedern (1x)
recessed ceiling springs (1x)


AWHK-3

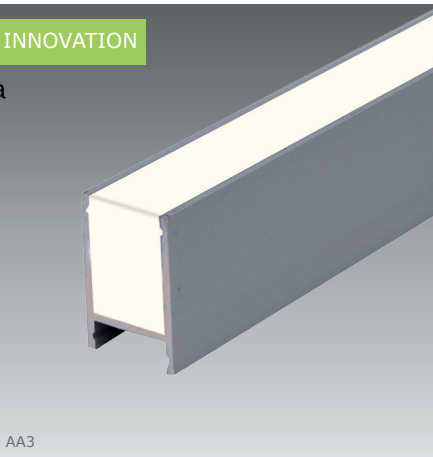


AA3




AA3-OP




AWP3




AWM3



AKF3



AWM3-SP



AWHK-3

PROFIL AAS2

· Aufbauprofil (aluminium anodized) with VerguB opal matt IP67
Standard: 10W/m, 600lm/m, 24V DC, warm white 3000K, CRI>80Ra
·Assembly with counterprofiles (AWP2 for inserting or AWM2 with (e) the end-sticks available on request;

- e
- Standard-Länge: 2000mm

· surface mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67

?standard:10W/m, 600lm/m, 24V DC, warmwhite 3000K, CRI>80Ra

·mounting with an anodised extruded aluminium frame (AwP2 will only slide into or AWM2 with space for cabeling)

? end caps on request; excl. converter;



240 LED's/meters

? Profile + cover opal white (without LED)
profile + cover opal white (without LED)

AAS2-OP

?Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter)

AAS2

?Subpart with slide-in function
aluminium frame with slide-in function





AWP2

?Cable channel with slide-in function
cable conduit with slide-in-function


AWM2

- recessed ceiling springs (1x)

AWHK-2

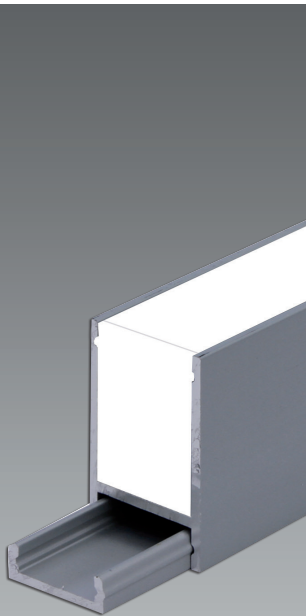

Example for AA3 with subpart AWF-3
example for AA3 with aluminium frame AWF-3

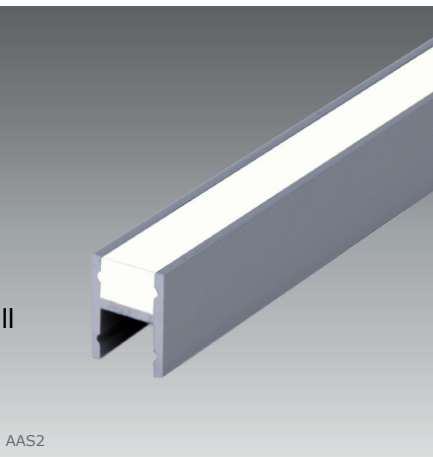


AAS2




AAS2-OP





AWP2



AWM2



AWHK-2

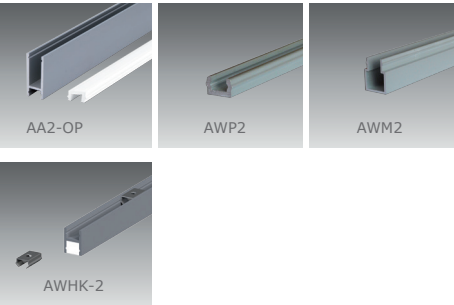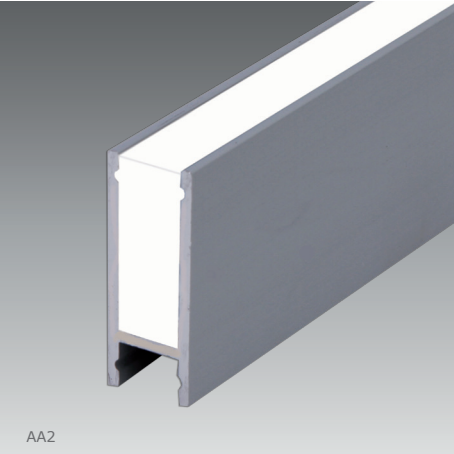

PROFIL AA2

?Construction profile (aluminium anodized) with VerguB opal matt IP67
?Standard: 10w/m, 350lm/m, 24V DC, warm white 3000K, CRI>80Ra
· Assembly with counter-profiles (AWP2 for inserting or AWM2 with Space for cable handling (e.g. Endstucke on request empty space for cable handling)

- Standard-Länge: 2000mm








?surface mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard: 10W/m,350lm/m, 24V DC, warm white 3000K, CRI>80Ra
·mounting with an anodised extruded aluminium frame (AWP2 will only slide into or AWM2 with space for cabeling)
· end caps on request

- *excl. converter*
- *standard length: 2000mm*



240 LED's/meters

- ? Profile + cover opal white (without LED)
profile + cover opal white (without LED) **AA2-OP**
- Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter) **AA2**
- ?Subpart with slide-in function
aluminium frame with slide-in function **AWP2**
- ? Cable channel with slide-in function
cable conduit with slide-in-function **AWM2**
- Deckeneinbaufedern (1x)
recessed ceiling springs (1x) **AWHK-2**



PROFIL AA3

?Construction profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 20W/m,1000lm/m, 24V DC, warm white 3000K, CRI>80Ra
·Assembly with counterprofiles (AWP3 for insertion or AWM3/ AKF3 with empty space for cable feeding); end sockets on request

-
- Standard-Länge: 2000mm



? surface mounted profiles (anodised aluminium) with opal semi translucent sealed encapsulation IP67
·standard:20W/m,1000lm/m,24VDC,warm white 3000K, CRI>80Ra
mounting with an anodised extruded aluminium frame (AWP3 will only slide into or AWM3/ AKF3 with space for cabeling)
? end caps on request; excl. converter



240 LED's/meters

- ? Profile + cover opal white (without LED)
profile + cover opal white (without LED) **AA3-OP**
- Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter) **AA3**
- ?Subpart with slide-in function
aluminium frame with slide-in function **AWP3**
- Cable channel NETHER with slide-in function
cable conduit LOW with slide-in-function **AWM3**
- ?Cable channel HIGH with slide-in function
cable conduit HIGH with slide-in-function **AKF3**
- Cable channel for hanging (NEW)
cable conduit to hang (NEW) **AWM3-SP**
- Deckeneinbaufedern (1x)
recessed ceiling springs (1x) **AWHK-3**

INNOVATION

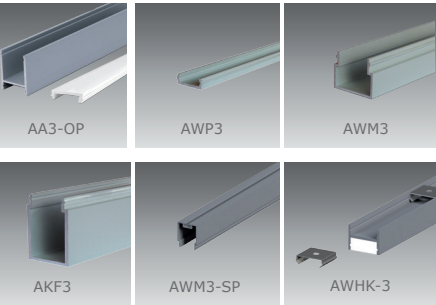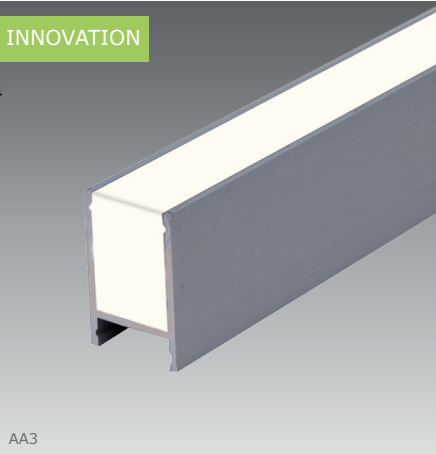

PROFIL AAS2

?Construction profile (aluminium anodized) with VerguB opal matt IP67
·Standard: 10W/m, 600lm/m, 24V DC, warm white 3000K, CRI>80Ra
· Assembly with counter-profiles (AWP2 for inserting or AWM2 with empty space for cable feeding); end-sticks on request;





-
- Standard length: 2000mm

·surface mounted profiles (anodlised aluminium) with opal semi translucent sealed encapsulation IP67
?standard:10W/m, 600lm/m, 24V DC, warmwhite 3000K, CRI>80Ra
· mounting with an anodised extruded aluminium frame (AWP2 will only slide into or AWM2 with space for cabeling)
? end caps on request; excl. converter;
?Standard length: 2000mm



240 LED's/meters

- ? Profile + cover opal white (without LED)
profile + cover opal white (without LED) **AAS2-OP**
- ?Profile + IP67 VerguB + LED (without converter)
profile + IP67 encapsulation + LED (without converter) **AAS2**
- Subpart with slide-in function
aluminium frame with slide-in function **AWP2**
- ?Cable channel with slide-in function
cable conduit with slide-in-function **AWM2**
- Deckeneinbaufedern (1x)
recessed ceiling springs (1x) **AWHK-2**

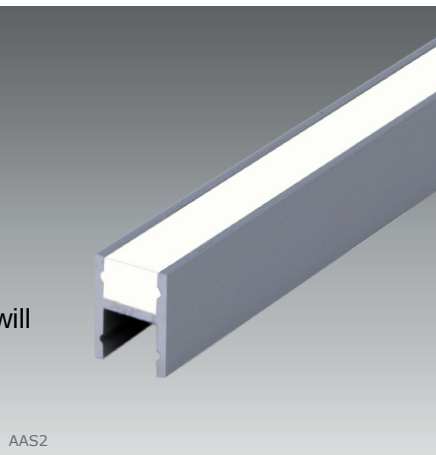

Example for EA-3 with cable channel AKF-3
example for EA-3 with cable conduit AKF-3

Example for AA3 with subpart AWF-3
example for AA3 with aluminium frame AWF-3