

ALURAYS LIGHTING TECHNOLOGY GMBH

Bespoke Lighting

Illumination lots on their needs

Taylor-made in Germany
Maßschneidert in Germany


We are a highly specialised supplier of
Light losses in the indoor application and in the
Außenbereich.

The competent team offers profound
knowledge in the field of light control,

mechanical robustness, toolless
Assembly and customized light distribution,
around in dialogue with light planners, architects
and partner of the electrical trade
unique and reliable light resolution
to generate.

alurays_

LIGHTING TECHNOLOGY



VARIABLE MÖGLICHKEITEN - INDOOR + OUTDOOR - NACH KUNDENSPEZIFIKATION


ALU - Standard profiles, anodised, painted
Various sizes, widths, etc. 15 mm - 80 mm
and according to customer requirements

LED's Standard and individually in the
alurays LED design also as RGB-W
switchable, dimmable - from DMX to DALI

LED, medium, carrying and cable channel profiles for
unterschiedliche Gesamthöhen und
kombinierbar mit diversen Betriebsgeräten

Covers clear, opal, smoke, partly
For optical film
or prepared for use in micro-prismatic optics

Casting technology for homogeneous
LED light line characteristics, for optical
Lenses and for light-technology reflectors



VISSMANN MITARBEITERRESTAURANT ALLENDORF

Outdoor

Akzentuierung Vordach
with LED light line and lens optics

for a homogeneous illumination

Lichtplaner
Luxwelt e. K.

Architekt
Blocher Partners

Elektroplaner
RSE Planungsgesellschaft mbH

© Joachim Grothus Fotografie

alurays_
LIGHTING TECHNOLOGY



Joachim GrothusFotografie/RSEPlanungsgesellschaft

VISSMANN MITARBEITERRESTAURANT ALLENDORF

Outdoor

Akzentuierung Vordach
with LED light line and lens optics

for a homogeneous illumination

Lichtplaner
Luxwelt e. K.

Architekt
Blocher Partners

Elektroplaner
RSE Planungsgesellschaft mbH

Joachim Grothus photography

alurays_
LIGHTING TECHNOLOGY




MENSA TUM, GARCHING

Fantomas won the competition for the Design of the food control system in the canteen New construction of TU Munich at the site Garching.

For the food control system, special developed, individually playable LED Band-installed. Digital steles and of Inform the ceiling suspended monitors the dailyuber5000Gaste.The The overall system is based on the following principles: New building of Meck Architekten.

Designbüro
fantomas Design GmbH & Co. KG

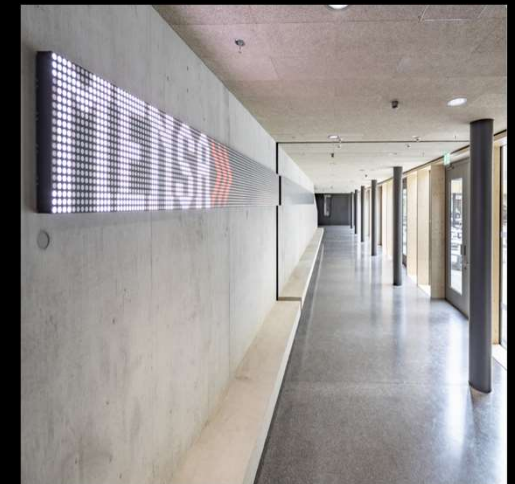


BABOR HEADQUARTER AACHEN

LED light line made according to the requirements
Light planner, architect and builder for
Projektlamellendecke
Diffuse light characteristics 270°

Bauherr
BARBOR, Aachen

Lichtplanung
DSTR, Aachen

Architekt
Architects, K2 GmbH,
Aachen

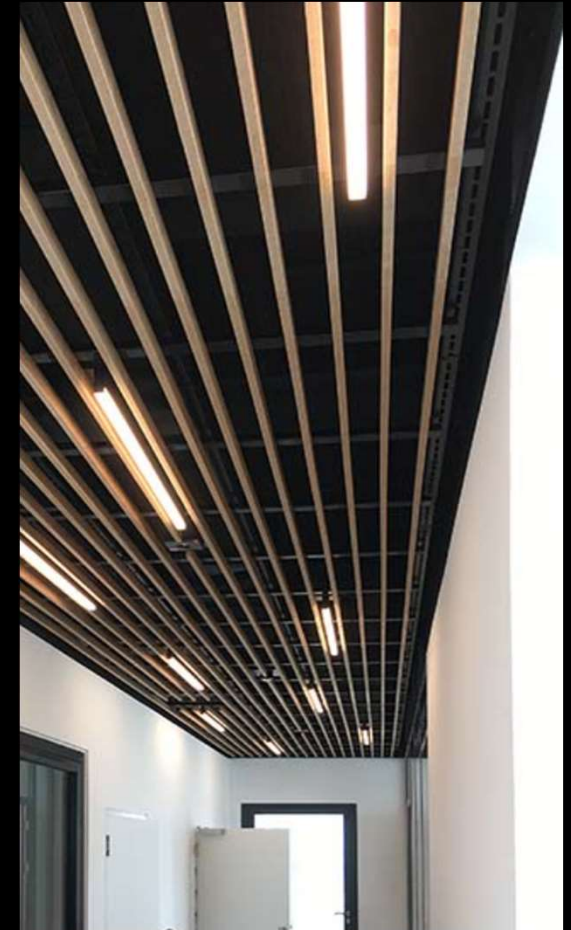

alurays_
LIGHTING TECHNOLOGY

**HAUSVOGTEIPLATZ
„KLAVIERFASSADE“
BERLIN**


Outdoor

LED-Klaviertastatur mittels „Lichtstrahlen“
in der Fassade
512 DMX Adressen individuell ansteuerbar
and individually dimmable

RBG-W Akzentuierung Dachfläche
und LED-Wandeinbaustruktur

Lichtplaner
SPG Schattenplaner
GmbH & Co.KG,
München

Bauherr
tewag GmbH
Regensburg

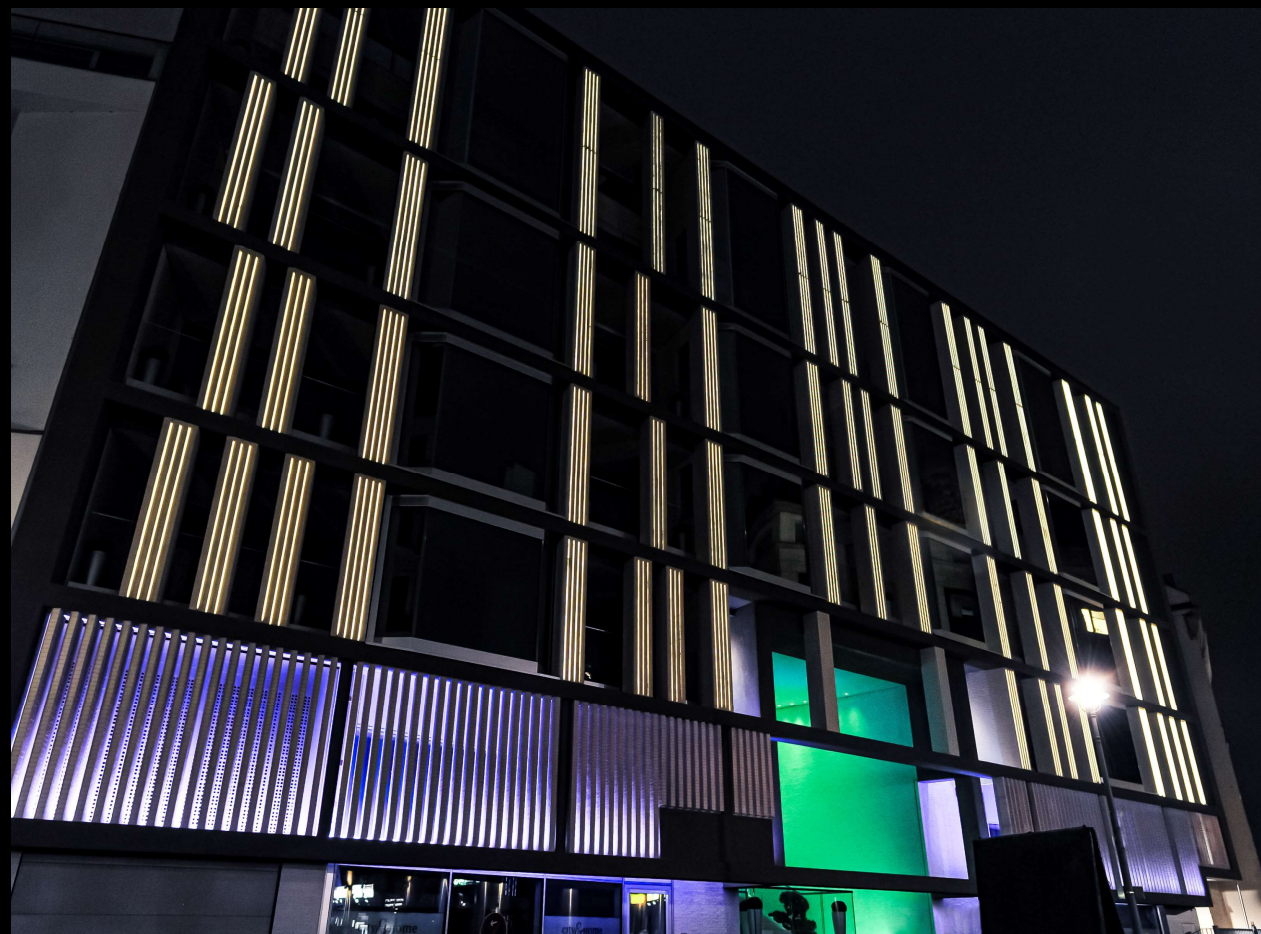

UPPER WEST "KU FU DA 11"
BERLIN

Outdoor

LED-Einbaulichtlinie mit
homogener Lichtcharakteristik
nach Kundenvorgabe

Hervorhebung
and
Akzentuierung Eingangsbereich

LED-Lichtlinie, IP67
Light colour 2.700 K

Lichtplaner
Kardorff, Berlin

alurays_
LIGHTING TECHNOLOGY



ZOB

CENTRAL OMNIBUS BAHNHOF

WEILHEIM

Outdoor

In Weilheim, Upper Bavaria, the headquarters were
Omnibus-Bahnhof im
August 2020 eingeweiht.

Der Bahnhof Weilheim ist ein bedeutender
Transport hub in the Oberland.

The environment has so far been less welcoming.
But now the area is upgraded - visually
and functional.

The cost of the project is:
currently to 7.7 million euros.

It is the first of a total of three
Construction phases at the station



© Ralf
Rüder

ZOB

CENTRAL OMNIBUS BAHNHOF

WEILHEIM

Outdoor

LED backlighting of the roof border

Bauherr

City of Weilheim in Upper Bavaria

Exporting company

Glasbau Gipser GmbH, Halle

Planungspartner

ATELIER PK ARCHITEKTEN, Berlin

Landschaftsplaner

bbz landschaftsarchitekten, Berlin

Lichtplanung

architekturimlicht, Berlin

alurays_
LIGHTING TECHNOLOGY



@ Ralf
Ruder

ETIHAD ARENA (YAS ARENA) ABU DHABI, VAE

Outdoor, project currently in exportation"

Miral Asset Management has
BAM International mit dem Bau der Etihad Arena
beauftragt.

The arena was designed by HOK (planning, archite
Engineering and planning buro) with the support of
Pascall+Watson entworfen.

Photographic companies
2000-2020 HOK Group, Inc.

© BAM International

<https://www.baminternational.com/en/projects/etihad-arena-abu-dhabi?position=5&list=mqltXGPPuSMd3OnFMjK4xHoFO9nMh>

© DNEC Ingenieurbüro

<https://dnec.com/portfolio-item/yas-arena/>



ETIHAD ARENA (YAS ARENA)
ABU DHABI, UAE

Outdoor, project currently in exportation"

Miral Asset Management has
BAM International mit dem Bau der Etihad Arena
beauftragt.

The arena was designed by HOK (planning, architectu
Ingenieur- und Planungsburo) with support of
Pascall+Watson entworfen.


Photographic companies in
2000-2020 HOK Group, Inc.

© BAM International

<https://www.baminternational.com/en/projects/etihad-arena-abu-dhabi?position=5&list=mqltXGPPuSMd3OnFMjK4xHofO9nMh>

© DNEC Ingenieurbüro


<https://dnec.com/portfolio-item/yas-arena/>

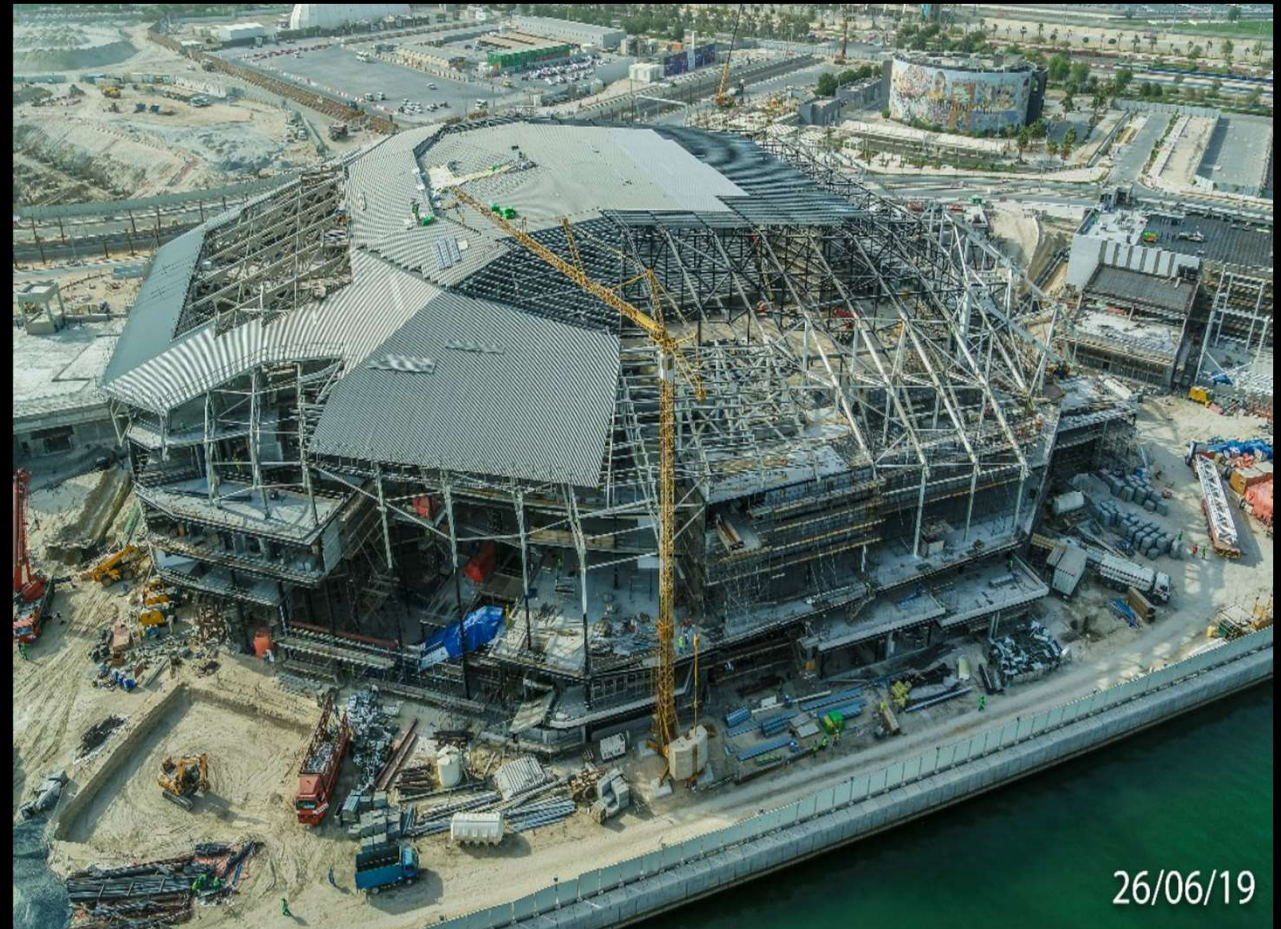

ETIHAD ARENA (YAS ARENA)

PROBEBELEUCHTUNG JANUAR 2021

alurays_
LIGHTING TECHNOLOGY

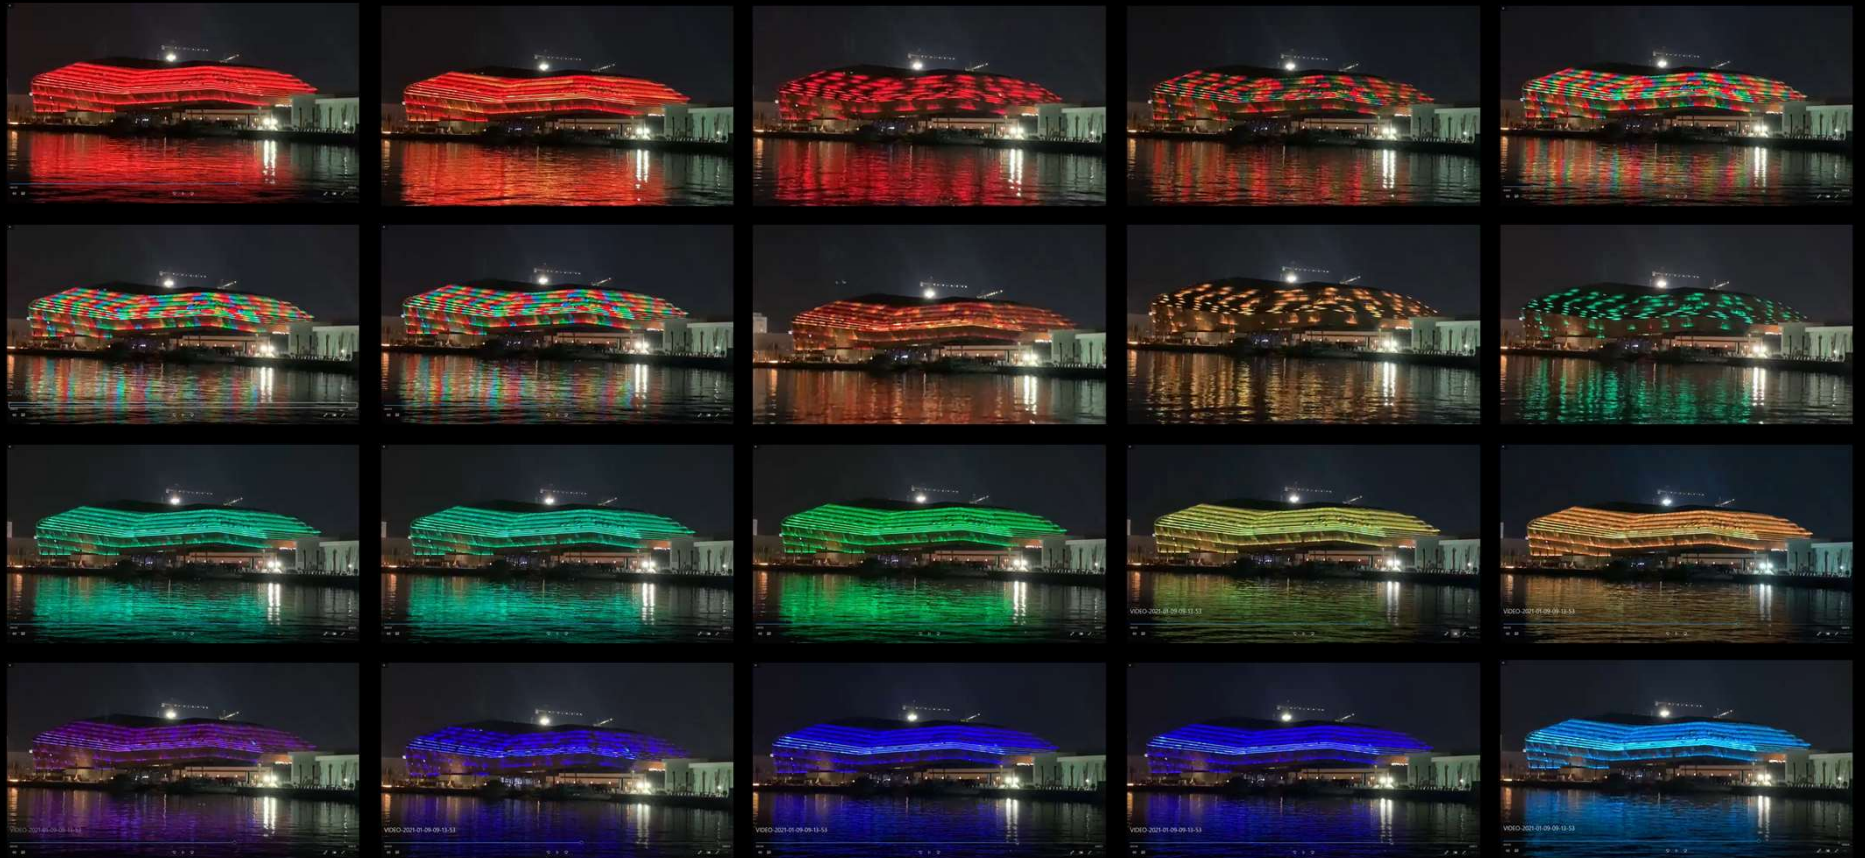

RATHAUS VORPLATZ HERBRECHTINGEN

Outdoor

LED-Bodeneinbaulichtlinien
for accentuation

Homogene Lichtcharakteristik
Vergossene LED-Bodenlichtprofile
Schutzart IP67

Fachplaner
Wiederkehr Landschaftsarchitekten
Nürtingen



Bild: Rudolf Stehle

RATHAUS VORPLATZ HERBRECHTINGEN


Outdoor

LED-Bodeneinbaulichtlinien
for accentuation

Homogene Lichtcharakteristik
Vergossene LED-Bodenlichtprofile
Schutzart IP67

Fachplaner
Wiederkehr Landschaftsarchitekten
Nürtingen

alurays_
LIGHTING TECHNOLOGY

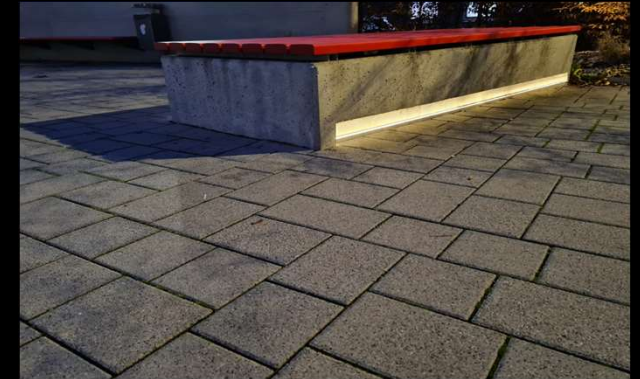

GATE MALL DOHA, KATAR

Outdoor


LED line accentuation and

nach Kundenvorgabe

DMX-Steuerung

individually adjustable and dimmable

alurays_
LIGHTING TECHNOLOGY

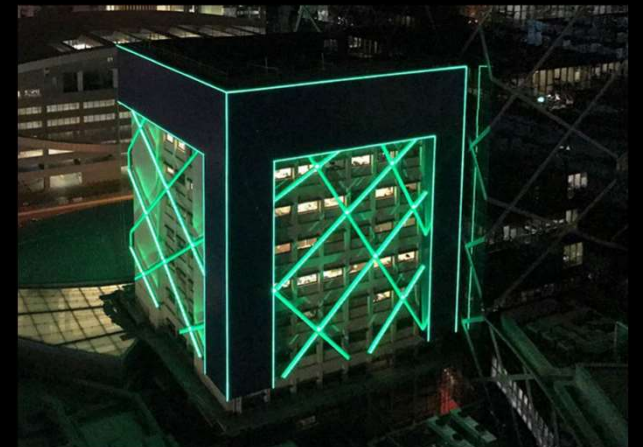


KIRCHE ST. MARGARETEN MIETENKAM

Outdoor

LED line feed on roof cover

accentuating facade and tree planting

LED light line, homogeneous and
LED-Linsenoptik
(vergossen, IP67)

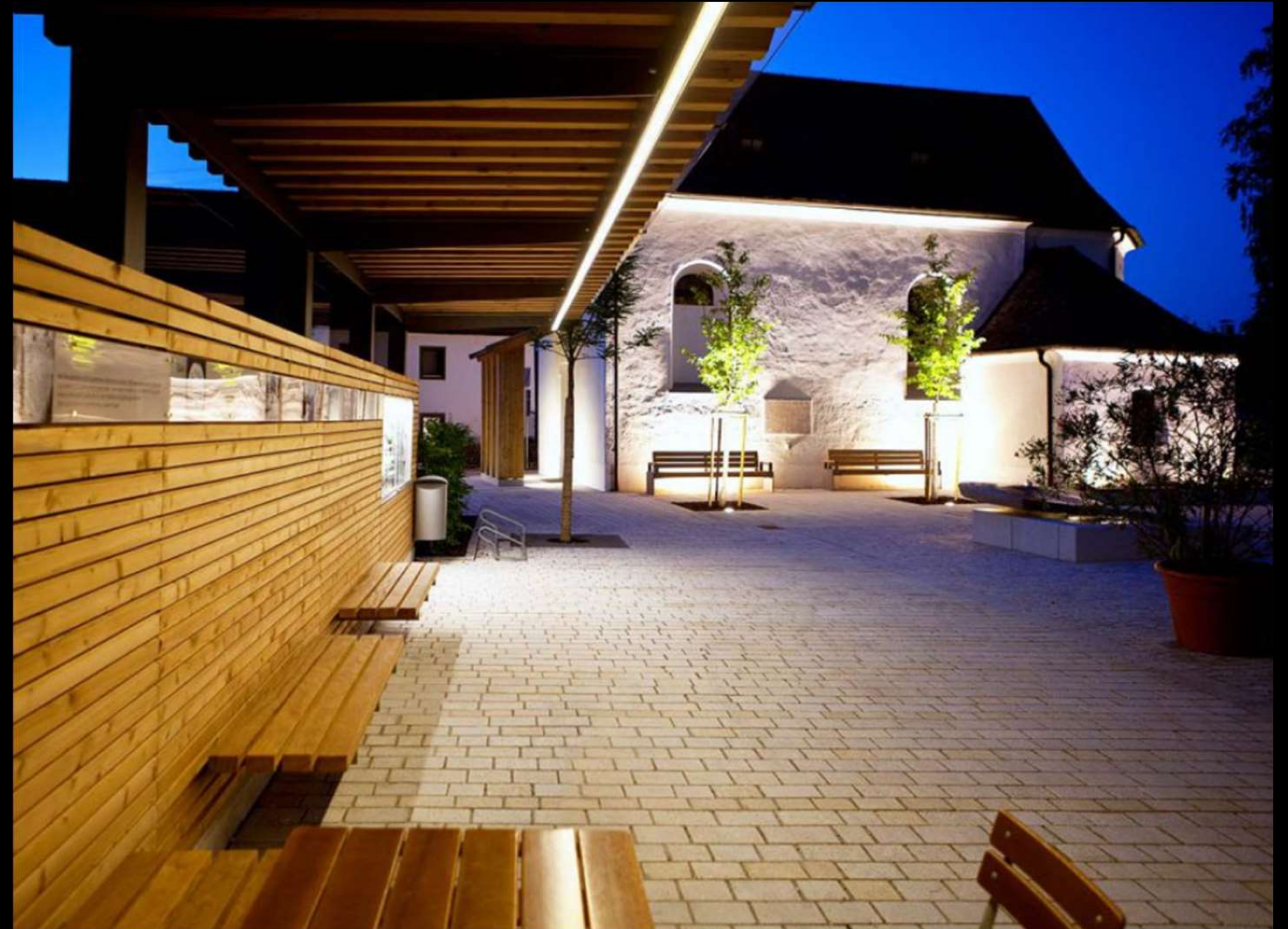

alurays_
LIGHTING TECHNOLOGY

BALANSTRAßE MÜNCHEN

Outdoor

LED lineare Fassadenleuchte
Homogene Lichtcharakteristik

LED light profile AAS2(B15xH20mm)

Aluprofil silber eloxiert IP67 Vollverguß

LED DC24V 3000K 10W/m

Lichtfarbe 3.000 K

IP67Connection cable MALE 2-pin approx.20cm

zum Anschließen an Miniatur FEMALE
Steckverbinder

Elektroinstallation

Bauer Elektroanlagen, Buchbach

Lichtplaner

DPA, London

DP ARCHITECTS PTE LTD

alurays_
LIGHTING TECHNOLOGY



W-HOTEL DUBAI, VAE

LED recessed light lines with
homogener Lichtcharakteristik
nach Kundenvorgabe

LED-Boden
LED-Wand
LED-Decken

LED installation system according to customer
Frameless and bodyless installation

Lokaler Partner
Decolight Trading Co. LLC

Designstudio - Architecture lighting
WGC International Jay Tan

alurays_
LIGHTING TECHNOLOGY



JUMEIRAH ART CENTER DUBAI, VAE

Outdoor

LED-Stufenakzentuierung

Gleichmäßige Indirektbeleuchtung

of the stairway board

nach

Customer specification and coordination architect

LED light line with homogenous

Lichtcharakteristik

alurays_
LIGHTING TECHNOLOGY



**MARQUARDT GMBH
RIETHEIM-WEILHEIM**

- **intern** -

Neubau
Development and Innovation Centre

LED DMX light ring in combination with Durlum
Deckensystem
RGB-W Farbsteuerung individuell

Architekt
PLAN FORWARD GmbH, Stuttgart

Fachplaner TGA
SCHNEPF Energy Technology Planning Group, Na

alurays_
LIGHTING TECHNOLOGY



MARQUARDT GMBH RIETHEIM-WEILHEIM

- intern -

Neubau
Development and Innovation Centre

LED DMX light ring in combination with Durlum
Deckensystem
RGB-W Farbsteuerung individuell

Architekt
PLAN FORWARD
GmbH, Stuttgart

Fachplaner TGA
SCHNEPF
Planungsgruppe
Energietechnik,
Nagold



alurays_
LIGHTING TECHNOLOGY

**ROBATHERM
HAUPTVERWALTUNG
JETTINGEN-SCHEPPACH**

- **intern** -

LED light lines integrated in catering

3D structure made to fit the machine and
eingearbeitet

Lichtplaner
Luxwelt e. K.

Architekt
Henn GmbH, München

Fachplaner TGA
Conplaning, Ulm
SCHNEPF Energy Technology Planning Group

alurays_
LIGHTING TECHNOLOGY



**ROBATHERM
HAUPTVERWALTUNG
JETTINGEN-SCHEPPACH**

- **intern** -

LED light lines integrated in
ceiling system maBjust manufactured and

Lichtplaner

Luxwelt e. K.

Architekt

Henn GmbH, Munich

Fachplaner TGA

Conplaning, Ulm

SCHNEPF Energy Technology Planning Group

© Henn Architekten / robatherm

alurays_
LIGHTING TECHNOLOGY



**IPD10 - LIGHT BAND FASSADE,
DACHAU**

Outdoor

LED-Miniatur-Lichtlinie
to the
accentuation of a facade edge

LED-Lichtlinie 37m, diffus
LED-Engine-Verguss IP67
Profile width 15 mm
pulverbeschichtet RAL 7038

Luminous flux approx. 600 lm/r
Externes Betriebsgerät DC48V

Lichtplaner
Lumen³, München



GERBEREITUNNEL, ERLANGEN


Outdoor

LED-Lichtlinie senkrecht
in different lengths

AA8035 Einbau 80mm x 35mm
Aluminium profile anodized with
Full cast, opal matte

Backside with IP67 connector
Lamps with:
3 switching ranges and
2 Schaltzuständen

Lichtplaner
Lunalicht, Karlsruhe

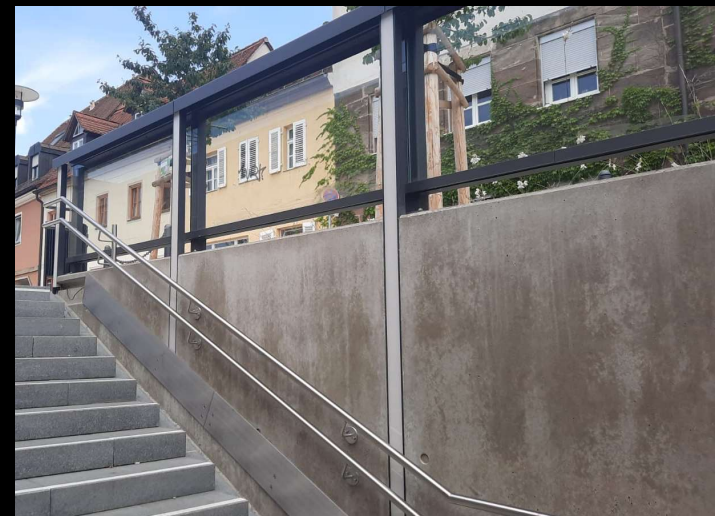

VISTA AOL, LINDAU

In the near
future

Outdoor

LED-3/6-fach-Lichtpunktlinie Kalotte
Anbau-ALU-Profilbasis, Farbe Weiß
Profilbasis AA3625+AKF3615+Kalotte opal
+ casting, B36 mm, approx.H50 mm,
Lichtfarbe 2.700 K, CRI>80, ca. 3W/6W
LED 3 step MacAdam, LED: > 100,000 h L80
Schutzart IP65

including proportional power supply ON/OFF
with plug-in system for cable connection
IP65 in plugged state.


Lamp for toolless wiring
"Plug and Play"

Lichtpartner

Zumtobel Lighting GmbH, Dornbirn
Zumtobel Group Deutschland GmbH, Munich



alurays_
LIGHTING TECHNOLOGY

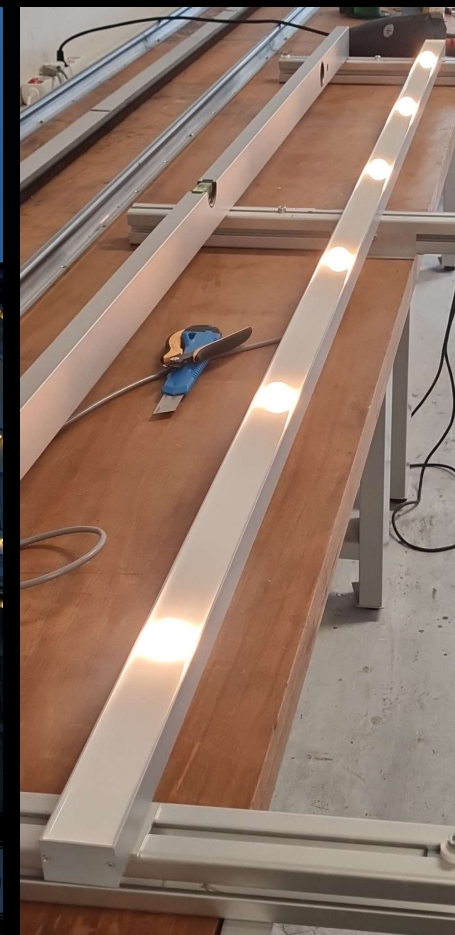

TECHNIKZENTRALE FRAPORT, FRANKFURT

demnächst

Outdoor

LED-Linearlichtlinie Fassadenleuchte

Protection class IP67consisting of:

LED linear luminaire and mounting profile

Aluminium-Aufbauprofil, eloxiert silber

Lambertsche Lichtcharakteristik

without visible LED points;

opal-white, translucent,

Light colour 3,000 K, (optionally 4,000 K)

Power approx. 15 W/m, DC 24V

Light output approx. 1.000 lm/m, CRI>80R

Share of external DALI operating rates,dimmable
with assembled secondary cable

Lichtpartner

Zumtobel Group Deutschland GmbH, Frankfurt

Bauherr

Fraport AG, Frankfurt

alurays_
LIGHTING TECHNOLOGY



MAXIMILIANEUM, MÜNCHEN

Indoor

RGB-W LED-Effektleuchte

Dimensions H100xT200x B100mm

Weight 1,5 kg

cable connection to the power supply;

Connecting line Power supply light

or lamp - lamp

and 1x CAT 7 patch cable

Switching power supply externally for 10 luminaires

konfektionierter Zuleitung;

All LED's are as one pixel with four channels

(RGBW) steuerbar

DMX input and output as RJ45

Designbüro

fantomas Design GmbH & Co. KG, Munich

507nanometer, München

alurays_
LIGHTING TECHNOLOGY



FDP
12

FREE
CHARACTERISTICS

20210082 4FFM, FRANKFURT

Exports

Outdoor

LED-Lichtlinie AA80/9975 TW27-65/80
Aluminiumprofil eloxiert, H75mm, B80mm
Glashalteleiste Farbe RAL 9006
and with VSG glass pane, satined

LED tunableWhite-Technologie

ca.2.700 K to ca. 6.500 K

Color rendering CRI 80

Light output approx. 1.200 lm/m

approx. 1,500 LEDs / m (approx. 750 per light cord)

Power: max. 30w / m

Including connection box and

with standard connection cables 4pin

Lichtpartner

Zumtobel Lighting GmbH, Dornbirn

Zumtobel Group Deutschland GmbH,

Frankfurt



alurays_
LIGHTING TECHNOLOGY



EA92, FRANKFURT

- Timber Pioneer -

In the near
future

LED-Linearsystem RGB-W

Light colour: ROT, GRÜN, BLUE, WHITE

Lichtfarbe WEISS - ca. 3.000 K

Power consumption approx. 12w / m

LED lamella light line aluminum anodized,
inklusive Montageklammern

External proportional DALI operating rate, dimmable
with secondary supply cables

and 4-channel DALI dimmers for

Einstellung der exakt gleichen Lichtfarbe

Cover PC satined, protection class IP20

Lichtplanung


AIL - Centralstudio, Berlin

Bauherr

UBM Development AG, Wien

PGE Grundstücksgesellschaft Europaviertel mbh,
Grünwald

alurays_
LIGHTING TECHNOLOGY

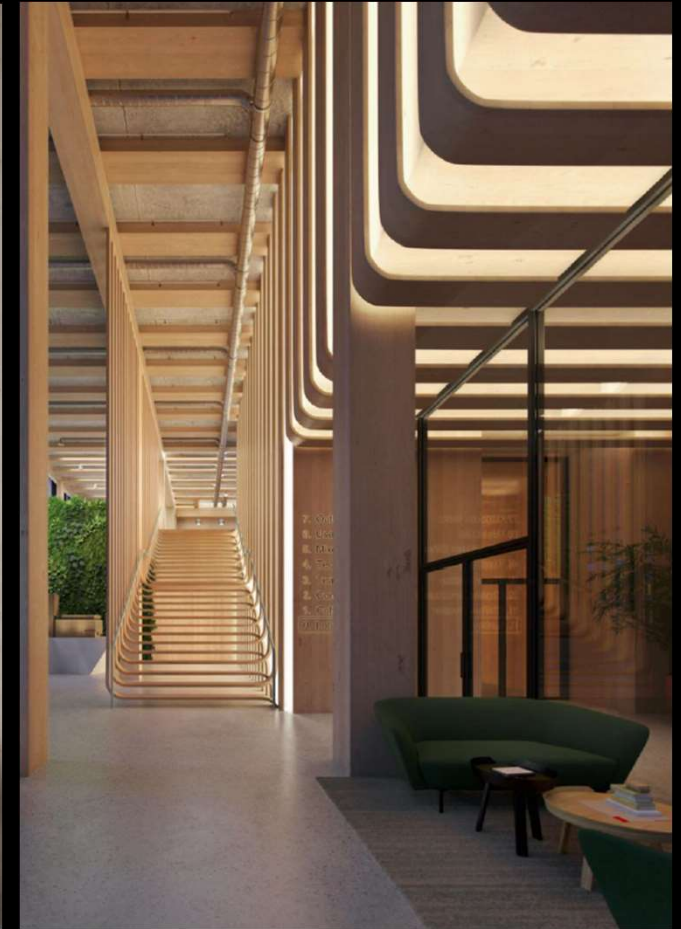

SCHATTDECOR AG, THANSAU

Exports

LED-Lamellenbeleuchtung-Aufbauprofil
Profilbasis AA4028+AWHK40+PC40 klar
Pulverbeschichtung Farbe RAL 9005 Struktur fein
Cover PC40clear, protection type IP20
LED-Optik Ausstrahlwinkel 20° x 45° FWHM
LED spacing 60mm+LEDPlatinum color black
Befestigungssystem AWHK40
on construction bolts on metal cover

luminous flux: approx. 1.350 lm/m, power: approx.
Light colour: 3.000 K; CRI>80
Externes anteiliges DALI-Betriebsgerät, dimmbar
Made up with secondary cable

Lichtplanung
Tropp Lighting Design, Weilheim

Architekt
S BAArchitecture and Urban Planning, Munchen



NOTARKASSE, MÜNCHEN

Horizontal-Anbauleuchte IP67 Diffus
Profilbasis AB5 + PC50 opal
Powder coating RAL 9005 + 9006 structure matt

Light colour approx. 3.000
Protection class IP67 with cas

z bei
Netzausfall 20 W/m (10 W + 10 W)

Mounting on the side of the handrail

luminous flux: approx. 1.350 lm/m, power: approx. 18
Light colour: 3.000K; CRI > 90 or high
External DALI operating gear, dimmable with

Lichtplanung

Tropp Lighting Design, Weilheim

Architekt

landau + kindelbacher Architekten Innenarchitekten
GmbH, München

alurays_
LIGHTING TECHNOLOGY



HISTORISCHE VILLA, BOGENHAUSEN

LED-Vouten-Lichtprofil für
symmetrical + asymmetrical light characteristics
Profilbasis AA4030-AKF4010+PC40 klar
w Diffusorfolie

and 55°LED positioning
3D holding system 15°+ 20°
Partially as arc lamp in the arc course

luminous flux: approx. 1.350 lm/m, power: approx. 1
Light colour: 3.000 K; CRI>90 or high
External DALI operating unit, dimmable with
Sekundärzuleitungskabel konfektioniert

Lichtplanung
Tropp Lighting Design, Weilheim

Architekt
Landau + kindelbacher Architekten Interior Designers
GmbH, München

alurays_
LIGHTING TECHNOLOGY



BÜROLEUCHTENSYSTEM

In the near
future

Indoor

LED-Büroleuchtersystem
Einzelleuchte oder Lichtband, Anbau, Pendel,
Einbau in Vorbereitung

Leuchtenmaterial
Leuchtenfarbe
Leuchtenmaße

anodized EV1 silver natural 10ur
B40 mmx H32mm

Reflektor-Optik Segment Länge 305mm
UGR 19(Office suitable), beam angle60°FWHM

Lichtausbeute
Leuchtenlichtstrom, max. 10.080 lm (adjustable)
Gesamtleistung, max.

Farbtemperatur 4.000 K, CRI > 80
Farbtoleranz 3 SDCM
LED-Lebensdauer L80 (25 °C) = 50.000 h
Schutzart IP20

LED-Pendelleuchte, direkt - indirekt optional;
auch Y-Seilabhängiger, längsseits beliebig verschiebbar;
long to 4m possible;

RAL paints (powder coating) possible;

nd Sensorik;

alurays_
LIGHTING TECHNOLOGY



alurays_

LIGHTING TECHNOLOGY
